

**TRANSFER PLUG , PASSIV**

UFL 40-pole

Ribbon cable connector



40-pole

Spring clamp terminals

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

[Link to Product](#)

Illustration

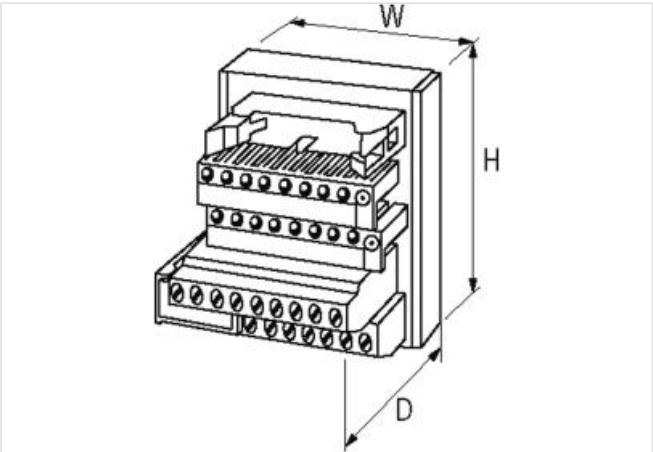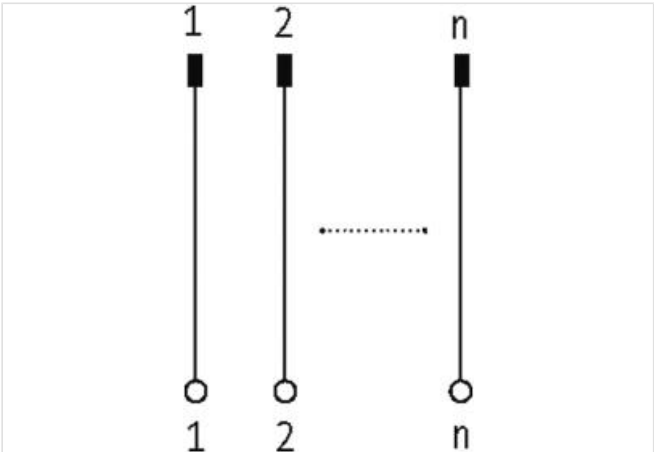

Product may differ from Image

Technical Data	
Operating voltage	24 V DC
Material group	EN 60664-1 over voltage, category III
Plug connector	for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook
Operating current per bit	max. 1 A
General data	
Mounting method	DIN-rail mountable (EN 60715)
Pollution Degree	2
Temperature range	-20...+70 °C
Connection	Spring clamp terminals

Dimensions H×W×D	75×70×70 mm
------------------	-------------

---

Product article number of manufacturer	546300
--	--------