



MMW ANALOG COUPLER COMPONENT

IN:-10...+10V/(0)4...20 mA - OUT:0...10V/(0)4...20 mA

INPUT: 0...5 V DC, 0...10 V DC, ±10 V DC
INPUT: 0...20 mA, 4...20 mA
Spring clamp terminals
Input, output, and supply voltage galvanically separated

[Link to Product](#)

Illustration

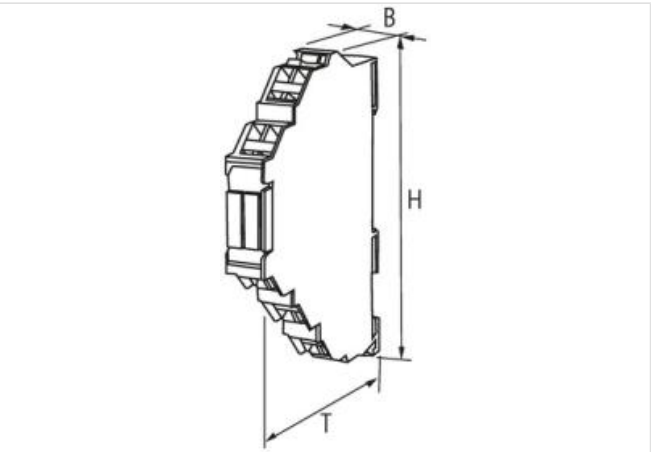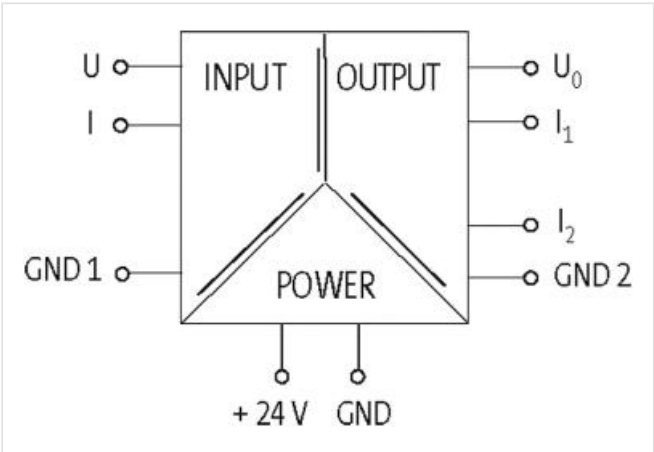

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C
Test isolation voltage	0.75 kV
Dimensions H×W×D	80×6.2×70 mm
Description	
Functional description	Due to an integrated current limiter on the output, the output is short circuit and overload protected. A special characteristic of the MULTI Converter Art.-No. 6644207 includes: Analog voltage signals 0...5 V/0...10 V and -10...+10 V and current signals 0.
Current outputs	
Load	max. 400 Ω

Product article number of manufacturer 6644207