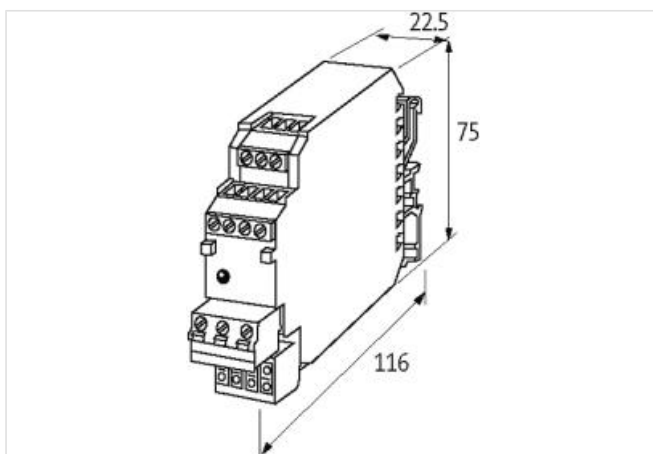
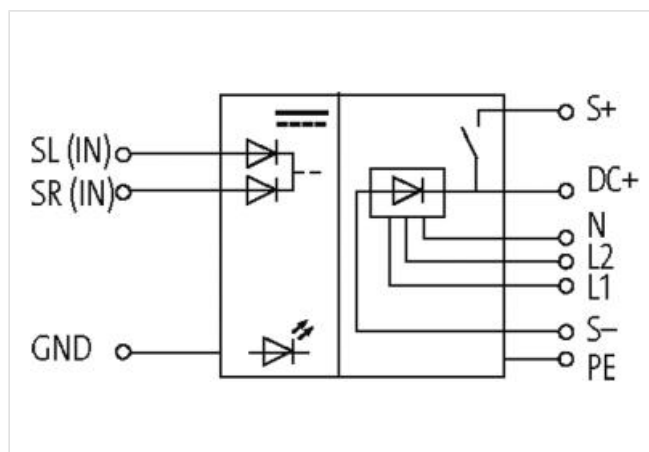


Active controlled rectifier V0.2

IN: 24 VDC - OUT: 200 VDC / 0,75 A

Control voltage: 24 V DC
 OUTPUT: 180, 205, 215 V DC
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+60 °C), no condensation
Protection	IP20
Connection	Spring clamp terminals
Dimensions HxWxD	22.5x75x85 mm

Output

Output voltage	205 V DC (230 V AC); 180 V DC (400 V AC); 215 V DC (480 V AC)
Switching frequency	max. 2.5 Hz
Output current	max. 0.75 A

Input

Input voltage	L1-N (230 V AC); L1-L2 (400 V AC); L1-L2 (480 V AC)
Invers-polarity protection	yes
Control voltage	24 V DC (ON: > 10 V DC; OFF: < 5 V DC)
LED display	LED (green)
Input current	max. 0.8 A

Product article number of manufacturer	50001
--	-------