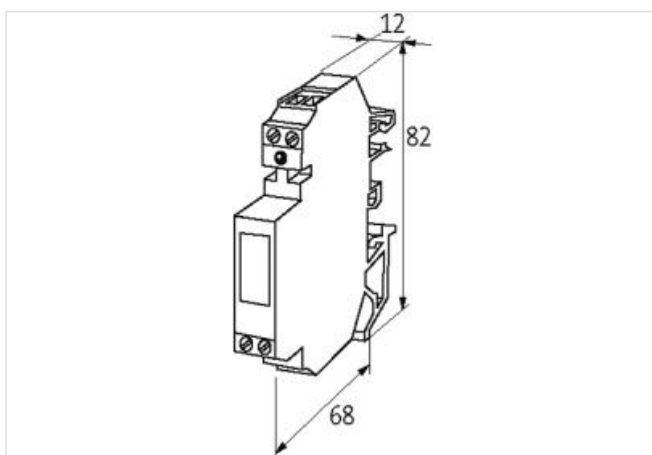
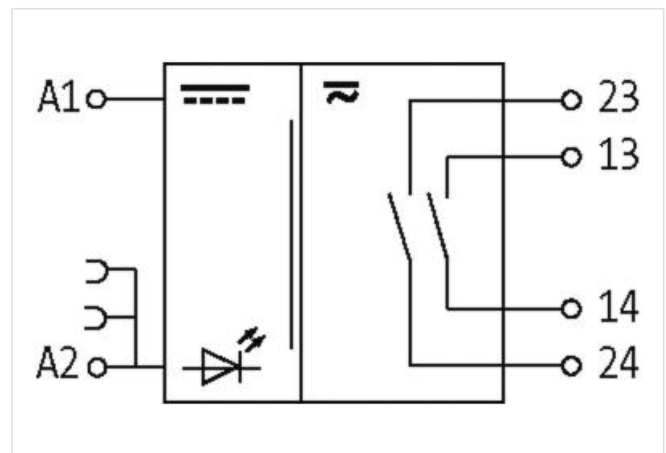


**RMMD-2A/24VDC INPUT RELAY**

IN: 24 VDC - OUT: 250 VAC/DC / 2 A

1 relay; 2 NO contacts  
 2 A  
 24 V DC  
 Screw terminals  
 with minus plug link

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	1.5 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions HxWxD	82x12x68 mm

**Output**

Min. load current	5 mA
Contact material	Ag Au
Energize/release/contact bounce time	10/10/1 ms

Switching voltage	max. 250 V AC/DC
-------------------	------------------

Switching frequency	max. 15 Hz
---------------------	------------

Power rating (voltage dependent)	max. 125 VA/60 W
----------------------------------	------------------

Switching current per output	max. 2 A
------------------------------	----------

**Input**

Plug link (supplied)	Art-No. 90960
----------------------	---------------

Connection voltage - current	24 V DC (19.2...30 V DC) - 15 mA
------------------------------	----------------------------------

LED display	LED (yellow)
-------------	--------------

**Utilization category**

AC-15	1 A (24 V AC); 0.1 A (230 V AC)
-------	---------------------------------

AC-1	2 A (24/110/230 V AC)
------	-----------------------

DC-13	0.8 A (24 V DC); 0.1 A (110 V DC); 0.01 A (230 V DC)
-------	--

Product article number of manufacturer	51140
--	-------