

Tree 8TX IP67 Metal - Unmanaged Switch - 8xM12

8 port unmanaged switch


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration



Product may differ from Image

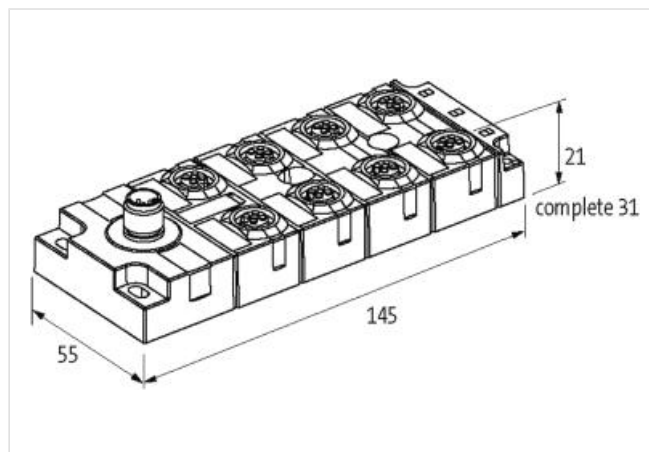

Technical Data

Operating voltage	2× 18...30 V DC, redundancy
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	4 hole screw mounting
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Housing	Zinc die casting, matte nickel plated
Protection	IP67
Dimensions H×W×D	145×55×31 mm

Connections

Fieldbus	8× M12 (female), D-coded
Supply	1× M12 (male), A-coded

Switch Management

Protocols	no
Port Mirroring	no
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Webserver	no
Switch Form	Unmanaged Switch

Product article number of manufacturer	58161
--	-------

Diagnostic

Communication status	via LED
Monitoring - no voltage	yes