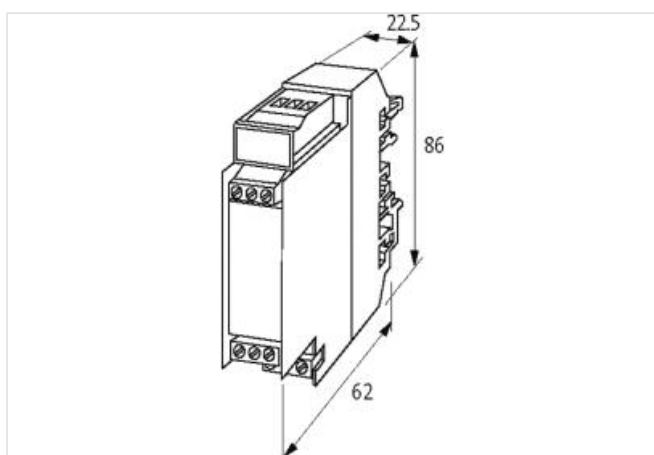
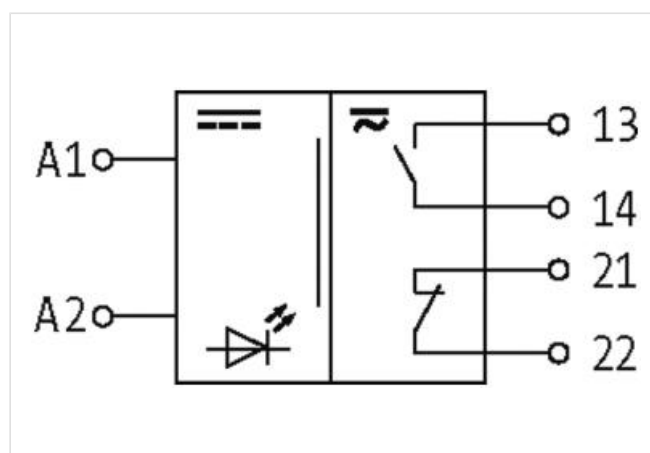


**MKS-RM 111/24V**

1 relay; 1 NO contact/1 NC contact  
 6 A  
 24 V DC  
 with force guided contacts  
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	10 000 000 switching cycles/load dependent
Dimensions H×W×D	86×22.5×62 mm

**Output**

Min. load current	10 mA
Contact material	Ag Ni 10 hv
Energize/release/contact bounce time	15/15/1.5 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 5 Hz

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Power rating (voltage dependent)	max. 1500 VA/100 W
----------------------------------	--------------------

Switching current per output	max. 6 A
------------------------------	----------

**Input**

Connection voltage - current	24 V AC/DC (21.6...28 V AC/DC) - 38 mA
------------------------------	----------------------------------------

LED display	LED (green)
-------------	-------------

**Utilization category**

AC-15	3 A (24/110/230 V AC)
-------	-----------------------

AC-1	6 A (24/110/230 V AC)
------	-----------------------

DC-13	3 A (24 V DC); 0.22 A (110 V DC); 0.1 A (230 V DC)
-------	----------------------------------------------------

Product article number of manufacturer	51302
----------------------------------------	-------