


MIRO 6.2 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 1 A

Transistor 1 A
24 V DC
Spring clamp terminals

[Link to Product](#)

Illustration

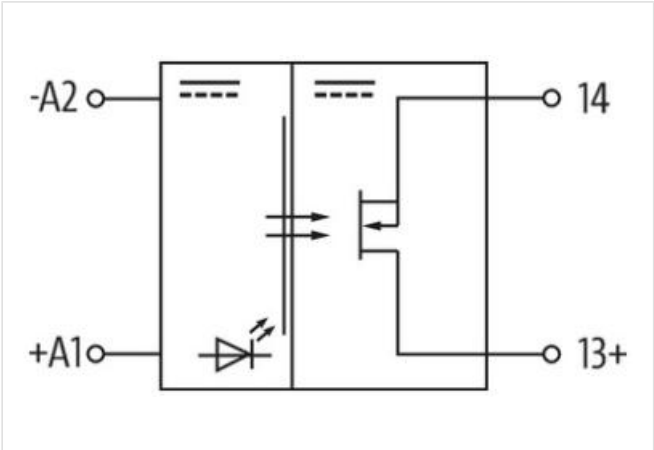

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	500 V
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm
Output	
Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	1.5/1 ms (100 mA load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	3...48 V DC
Switching frequency	max. 40/4 Hz (resist./ind.)

Switching current per output 500 μ A...1 A

Input

Control current 6 mA

Voltage range OFF 0...5 V DC

Voltage range ON 11...30 V DC

LED display LED (yellow)

Product article number of manufacturer 6652515