



MIRO TRIAC 1X400VAC-10A

IN: 53 VDC - OUT: 400 VAC / 10 A

Triac 10 A
24 V DC
Screw plug-in terminals

[Link to Product](#)

Illustration

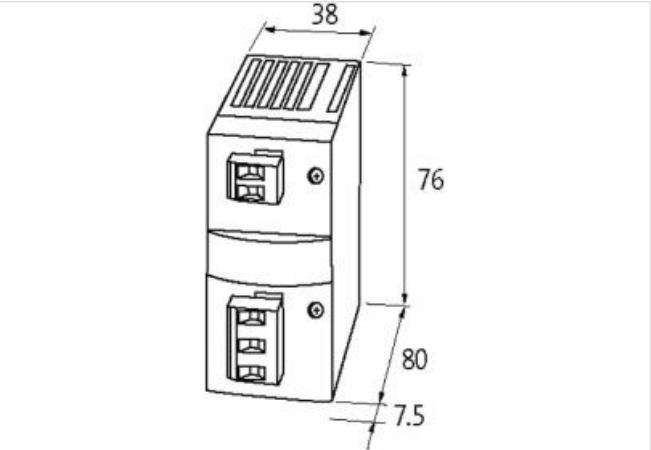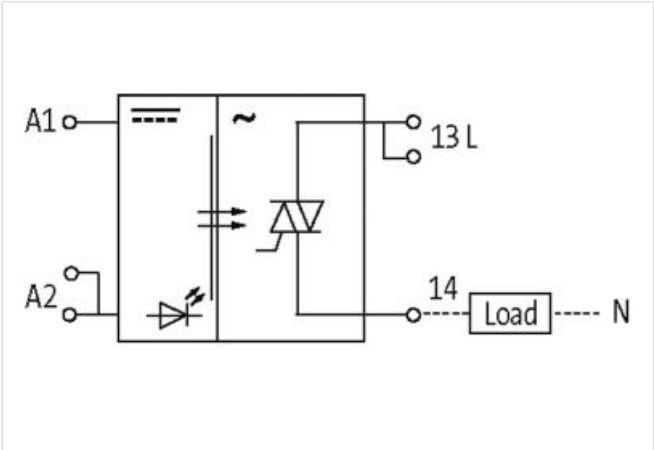

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Housing	Black plastic, flame retardant
Dimensions H×W×D	76×38×80 mm
Output	
Surge current	70 A
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 0.15 V AC
Switching voltage	12...400 V AC
Switching frequency	max. 20/1 Hz (resist./ind.)

Switching current per output 100 mA/10 A (no derating)

Input	
Control voltage	24 V DC
Control current	approx. 7.8 mA
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (green)
Product article number of manufacturer 3000-36001-2000025	