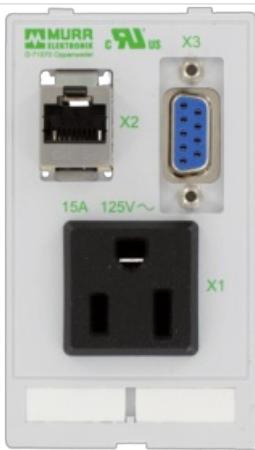


MODLINK MSDD SINGLE COMBI INSERT USA NEMA 5-15

1xSUD-D9 female/male + 1xRJ45 female/female

1× NEMA 5-15 (plug-solder connection)
 1× RJ45, 8-pole metal, CAT5e (female/female)
 1× SUB-D9 (female/male)

[Link to Product](#)
Illustration


Product may differ from Image


General data

Dimensions H×W×D 88×51×30 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

SUB-D9

Connection rear side	SUB-D (male)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

USA

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Connection	Plug-solder connection: 4.8x0.5 mm
Product article number of manufacturer	4000-68000-4020000