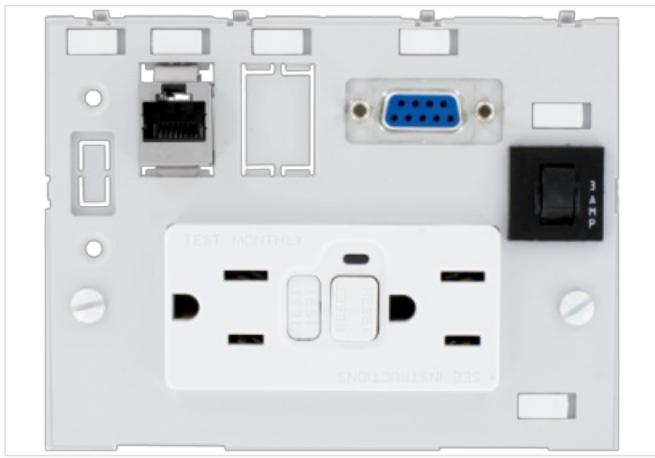


MODLINK MSDD DBL COMBI INSERT USA 2XNEMA 5-15

GFCI+1xRJ45 fem./fem.+1xSUB-D9 fem./male+1x3A fuse

2x NEMA-GFCI 5-15 (screw terminals)
 1x RJ45, 8-pole metal, CAT5e (female/female)
 1x SUB-D9 (male/female)
 1x fuse (3 A)
 with touch protection

[**Link to Product**](#)
Illustration


Product may differ from Image


General data

Dimensions H×W×D 88×116×72 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

SUB-D9

Connection rear side	SUB-D (male)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

Fuse

Operating voltage 250 V AC/32 V DC

Continuous load	3 A
-----------------	-----

USA

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Screw terminals: max. 2x 6 mm ² (AWG 10)
Product article number of manufacturer	4000-68000-4130000