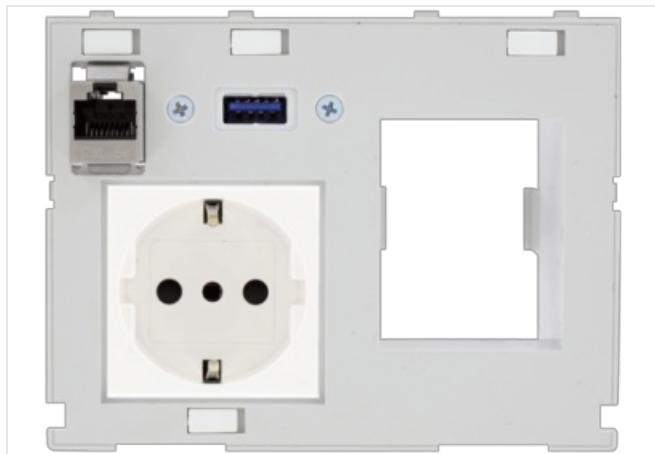


MODLINK MSDD DBL COMBI INSERT ITALY

1xRJ45+USB-A + RCD opening

[Link to Product](#)
Illustration


Product may differ from Image

General data

Dimensions H×W×D 88×116×70 mm

RJ45

Operating current (UL Rating) max. 175 mA

Locking of ports Snap In

Connection front side RJ45

Connection rear side RJ45

Operating voltage (UL Rating) max. 30 V AC/42.4 V DC

Specification CAT5e, Class D, 100 MHz, (EN 50173-1)

USB

Operating current 1.5 A

Specification USB: 3.0 (max. 5 Gbit/s)

Locking of ports Snap In

Operating voltage 48 V AC/DC

Operating voltage (UL Rating) max. 30 V AC/42.4 V DC

Italy (CEI 23-16)

No. of poles 2 + PE

 Connection Screw terminals: max. 2× 4 mm² (AWG 12)

Operating voltage 250 V AC

Operating current 16 A

Product article number of manufacturer 4000-68000-4330003