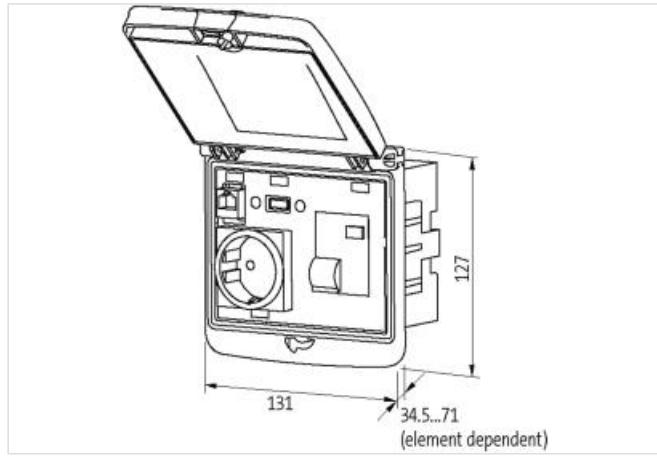


Modlink MSDD-set: Frame 4000-68523-0000001,

insert 4000-68000-4120000

with touch protection

[Link to Product](#)
Illustration


Product may differ from Image


Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-30...+70 °C (storage temperature -30...+80 °C)
Housing	Frame: plastic PA black, cap: plastic ABS metallic

General data

Dimensions H×W×D	88×116×72 mm
------------------	--------------

RJ45

Operating current (UL Rating)	max. 175 mA
-------------------------------	-------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)
Fuse	
Operating voltage	250 V AC/32 V DC
Continuous load	3 A
USA	
Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Screw terminals: max. 2x 6 mm ² (AWG 10)
Product article number of manufacturer	4000-68523-4120001