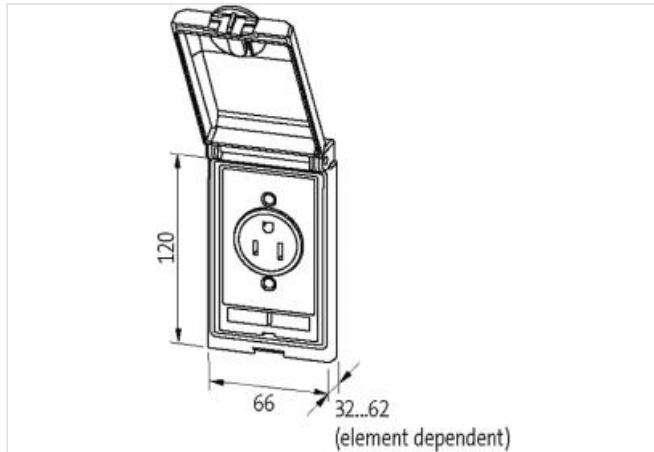


**Modlink MSDD-set: Frame 4000-68112-0000000,**

insert 4000-68000-0010000

[Link to Product](#)
**Illustration**


Product may differ from Image

**Frame**

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, KTL coated

**Germany (VDE)**

Connection	Screw terminals: max. 2x 6 mm <sup>2</sup> (AWG 10)
Operating voltage	250 V AC
No. of poles	2 + PE
LED display	yellow
Operating current	16 A

Product article number of manufacturer	4000-68112-0010000
--	--------------------