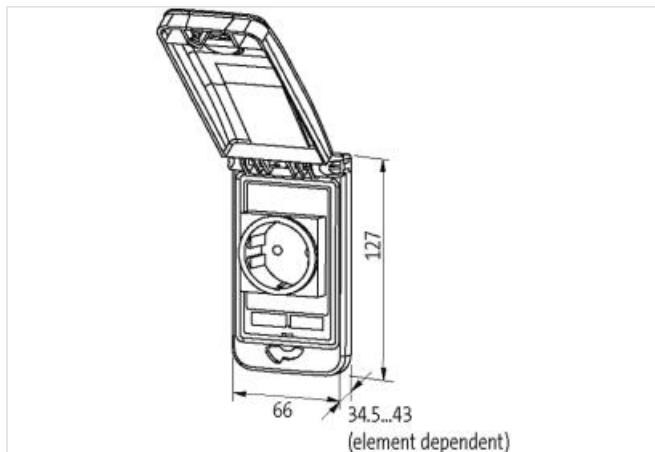
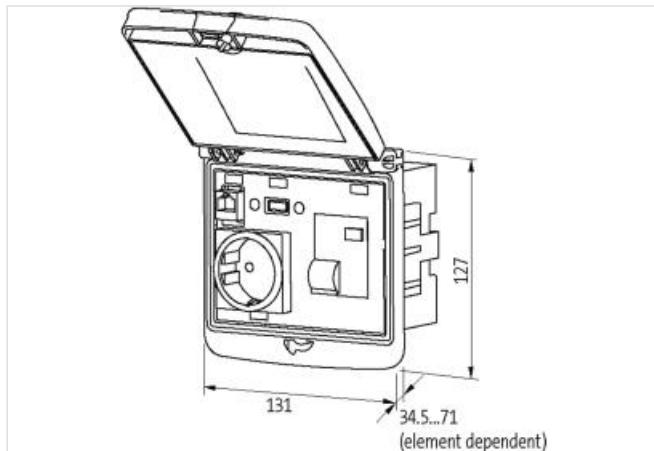


Modlink MSDD-set: Frame 4000-68513-0000001,

insert 4000-68000-3010000

[Link to Product](#)
Illustration


Product may differ from Image

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-30...+70 °C (storage temperature -30...+80 °C)
Housing	Frame: plastic PA black, cap: plastic ABS metallic

France (UTE-NF)

Connection	Screw terminals: max. 2× 4 mm ² (AWG 12)
Operating current	16 A
No. of poles	2 + PE
Operating voltage	250 V AC
Product article number of manufacturer	4000-68513-3010001