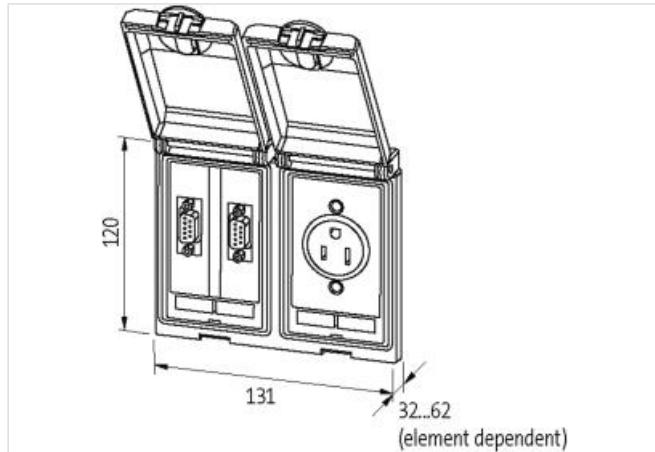


Modlink MSDD-set: Frame 4000-68123-0000000,

insert 4000-68000-1480000

[Link to Product](#)
Illustration


Product may differ from Image

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, with surface finishing

SUB-D9

Connection rear side	SUB-D (female)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole

Operating voltage 48 V AC/DC

RJ12

Operating voltage	max. 48 V AC/DC
Connection front side	RJ12
Connection rear side	RJ12
Locking of ports	Snap In
Operating current	max. 1 A
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current (UL Rating)	max. 175 mA

USB

Operating current	max. 500 mA
Specification	USB: 2.0 (max. 480 Mbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	42.4 V DC

Shielding plate

Tightening torque	0.9 Nm ± 0.1
Connection	Threaded hole M4

Product article number of manufacturer 4000-68123-1480000