


**Modlink MSDD-set: Frame 4000-68122-000000,**  
insert 4000-68000-0240000 + 4000-68000-0010000

[Link to Product](#)

Illustration

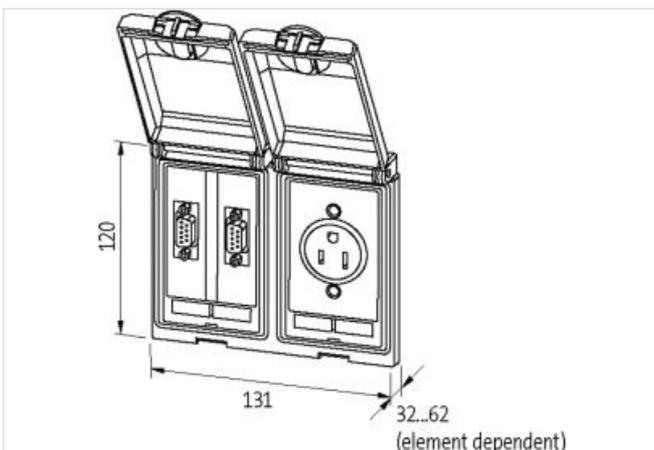

Product may differ from Image

<b>Frame</b>	
suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, KTL coated
<b>SUB-D9</b>	
Connection rear side	SUB-D (female)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC
<b>Germany (VDE)</b>	
Connection	Screw terminals: max. 2× 6 mm <sup>2</sup> (AWG 10)
Operating voltage	250 V AC
No. of poles	2 + PE
LED display	yellow
Operating current	16 A
Product article number of manufacturer	4000-68122-0240010