


Modlink MSDD-set: Frame 4000-68123-0000000,
 insert 4000-68000-0900000 + 4000-68000-0040000

[Link to Product](#)

Illustration

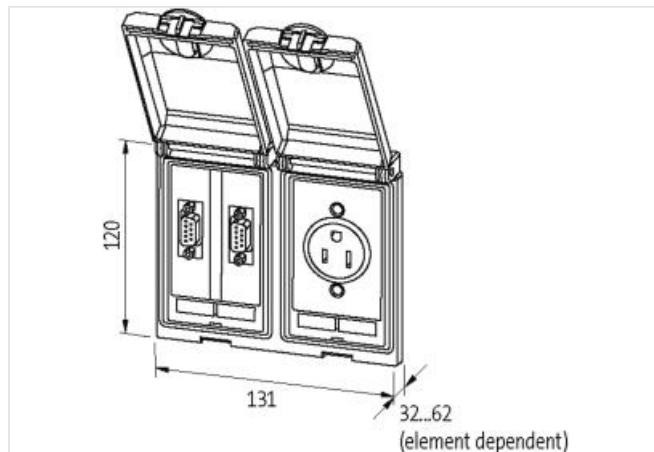

Product may differ from Image

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, with surface finishing

USB

Operating current	max. 500 mA
Specification	USB: 2.0 (max. 480 Mbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	42.4 V DC

USA

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Screw terminals: max. 2x 2.5 mm ² (AWG 14)
Product article number of manufacturer	4000-68123-0900040