


Modlink MSDD-set: Frame 4000-68122-000000,
insert 4000-68000-0150000 + 4000-68000-0200000

Link to Product

Illustration

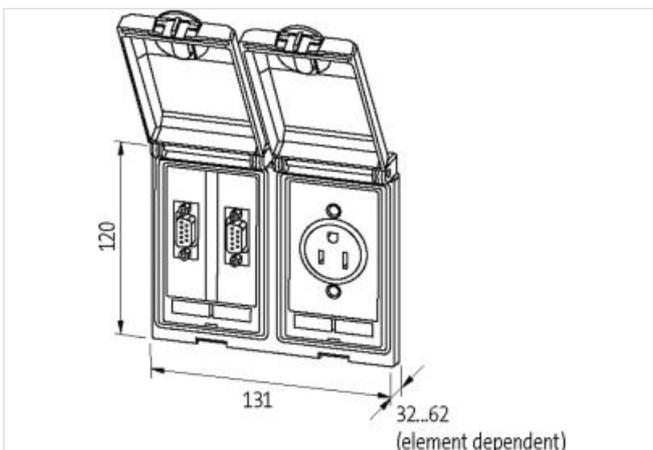

Product may differ from Image

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, KTL coated

SUB-D9

Connection rear side	SUB-D (male)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

France (UTE-NF)

Connection	Spring clamp terminals: max. 2x 2.5 mm ² (AWG 14)
Operating current	10...16 A
No. of poles	2 + PE
Operating voltage	250 V AC

Product article number of manufacturer	4000-68122-0150200
--	--------------------