


Modlink MSDD-set: Frame 4000-68522-0000001,
insert 4000-68000-0010000 + 4000-68000-1440000

[Link to Product](#)

Illustration

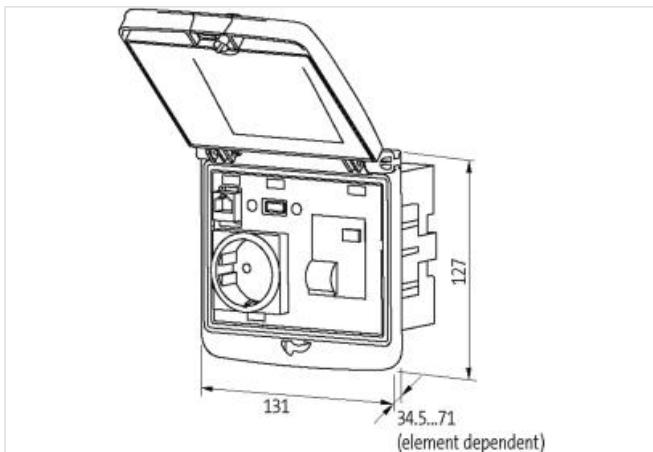

Product may differ from Image

Frame

| | |
|---|--|
| suitable for mounting with wall thickness | 1...5 mm |
| Protection | IP65 |
| Temperature range | -30...+70 °C (storage temperature -30...+80 °C) |
| Housing | Frame: plastic PA black, cap: plastic PC transparent |

RJ45

| | |
|-------------------------------|---------------------------------------|
| Operating current (UL Rating) | max. 175 mA |
| Locking of ports | Snap In |
| Connection front side | RJ45 |
| Connection rear side | RJ45 |
| Operating voltage (UL Rating) | max. 30 V AC/42.4 V DC |
| Specification | CAT5e, Class D, 100 MHz, (EN 50173-1) |

SUB-D9

| | |
|-------------------------------|------------------------|
| Connection rear side | SUB-D (female) |
| Operating current (UL Rating) | max. 175 mA |
| Connection front side | SUB-D (female) |
| Locking of ports | UNC 4...40 bolt |
| Operating voltage (UL Rating) | max. 30 V AC/42.4 V DC |
| Operating current | 3 A |
| No. of poles | 9-pole |
| Operating voltage | 48 V AC/DC |

USB

| | |
|-------------------------------|--------------------------|
| Operating current | 1.5 A |
| Specification | USB: 3.0 (max. 5 Gbit/s) |
| Locking of ports | Snap In |
| Operating voltage | 48 V AC/DC |
| Operating voltage (UL Rating) | max. 30 V AC/42.4 V DC |

Germany (VDE)

| | |
|-------------------|---|
| Connection | Screw terminals: max. 2x 6 mm ² (AWG 10) |
| Operating voltage | 250 V AC |
| No. of poles | 2 + PE |
| LED display | yellow |
| Operating current | 16 A |

Shielding plate

| | |
|-------------------|------------------|
| Tightening torque | 0.9 Nm ±0.1 |
| Connection | Threaded hole M4 |

Product article number of manufacturer 4000-68522-0011441