


Modlight Illumix Slim Line 32W

LED machine lamp, IP54, 24VDC, M8 connection

Modlight Illumix Slim Line
32 W

[Link to Product](#)

Illustration

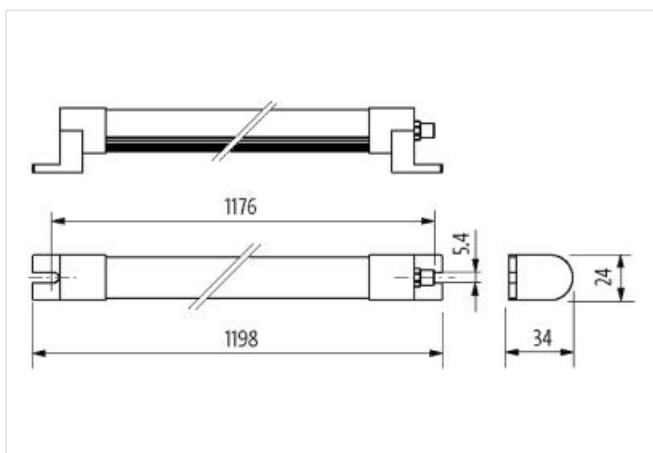

Product may differ from Image



Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M8 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 3360 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Lighting angle	> 120°
----------------	--------

Input current	32 W
---------------	------

General data

Mounting method	rotatable
-----------------	-----------

Temperature range	-30...+50 °C
-------------------	--------------

Material (housing)	Anodized aluminum
--------------------	-------------------

Material (light cover)	Diffuse polystyrene (PS)
------------------------	--------------------------

Installation altitude	Operation up to 2 000 m
-----------------------	-------------------------

Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
------------------	--------------------------------

Screw head-Ø	max. 12 mm/M5
--------------	---------------

Relative humidity	5...95%
-------------------	---------

Protection	IP54
------------	------

Dimensions H×W×D	34×1198×24 mm (1.34×47.17×0.94 in)
------------------	------------------------------------

Shock load	50 g, 11 ms
------------	-------------

Product article number of manufacturer	4000-75800-1715032
--	--------------------