



Modlight Illumix Classic Line 12W

LED machine lamp, IP67, 24VDC, M12 connection

Modlight Illumix Classic Line
12 W

Link to Product

Illustration

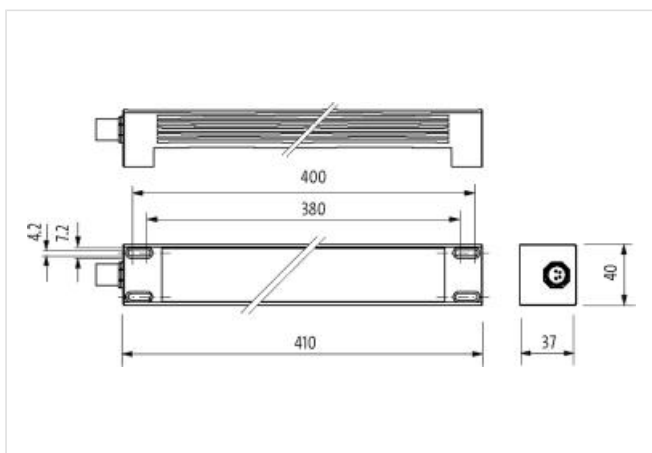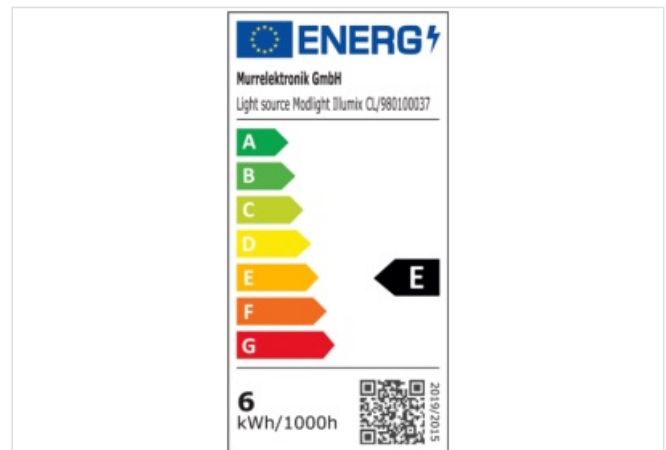

Product may differ from Image



Technical Data

| | |
|-------------------------|--------------------------------|
| Operating voltage | 24 V DC (21.6...27.6 V DC) |
| No. of poles | 4-pole |
| Coding | A-coded |
| Connection | M12 (male) |
| Luminaire light yield | approx. 105 lm/W |
| Luminaire light current | approx. 1260 lm |
| Color reproduction (Ra) | > 80 |
| Light color | Daylight white, approx. 5500 K |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

| | |
|----------------|--------|
| Lighting angle | > 120° |
| Input current | 12 W |

General data

| | |
|------------------------|--|
| Mounting method | rotatable |
| Temperature range | -30...+50 °C |
| Material (housing) | Anodized aluminum |
| Material (light cover) | diffuse single-pane safety glass (ESG), 4 mm |
| Installation altitude | Operation up to 2 000 m |
| Vibration stress | 2...9 Hz/10 mm; 9...200 Hz/3 g |
| Screw head-Ø | max. 12 mm/M5 |
| Relative humidity | 5...95% |
| Protection | IP67 |
| Dimensions H×W×D | 37×410×40 mm (1.46×16.14×1.57 in) |
| Shock load | 50 g, 11 ms |

| | |
|--|--------------------|
| Product article number of manufacturer | 4000-75801-1415012 |
|--|--------------------|