


Modlink MSDD-set: Frame 4000-68223-0000000,
 insert 4000-68000-0030000 + 4000-68000-0710000

[Link to Product](#)

Illustration

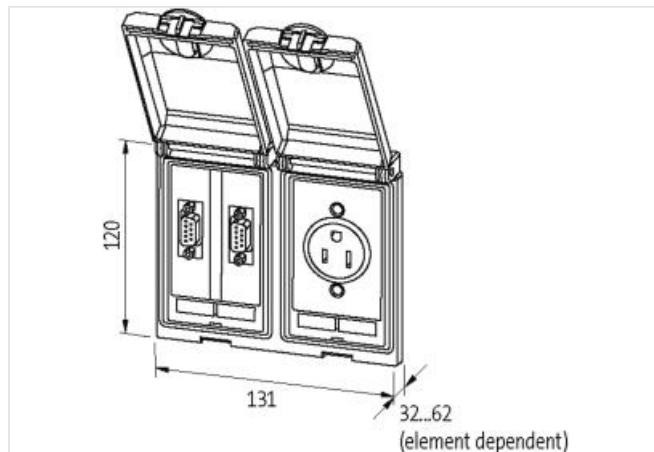

Product may differ from Image

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Frame: zinc die-casting, with surface finishing, Lid: plastic, PC transparent

USA

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Plug-solder connection: 4.8×0.5 mm

SUB-D25

Locking of ports	UNC 4...40 bolt
Operating current	3 A
Connection rear side	SUB-D (solder connection)
Connection front side	SUB-D (female)
Operating voltage	48 V AC/DC
Operating current (UL Rating)	max. 175 mA
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
No. of poles	25-pole

Product article number of manufacturer 4000-68223-0030710