


Modlink MSDD-set: Frame 4000-68223-0000000,
 insert 4000-68000-0010000 + 4000-68000-0050000

[Link to Product](#)

Illustration

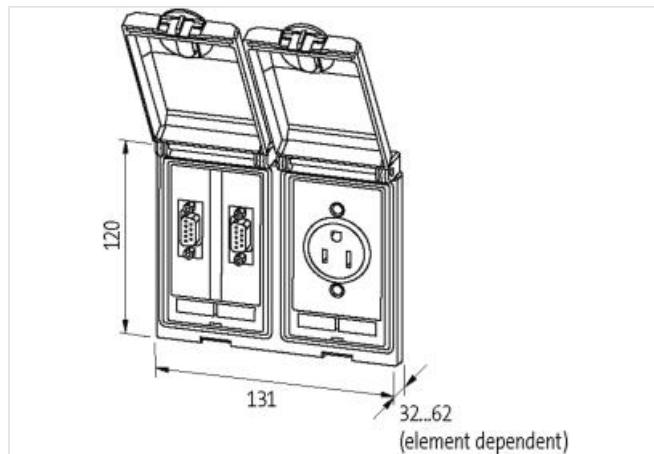

Product may differ from Image

Frame

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Frame: zinc die-casting, with surface finishing, Lid: plastic, PC transparent

Germany (VDE)

Connection	Screw terminals: max. 2x 6 mm ² (AWG 10)
Operating voltage	250 V AC
No. of poles	2 + PE
LED display	yellow
Operating current	16 A

France (UTE-NF)

Connection	Screw terminals: max. 2x 6 mm ² (AWG 10)
Operating current	16 A
LED display	yellow
No. of poles	2 + PE
Operating voltage	250 V AC

Product article number of manufacturer 4000-68223-0010050