

Modlight Illumix Slim Line 24W


LED machine lamp, IP54, 24VDC, M8 connection

Modlight Illumix Slim Line

24 W

Link to Product

Illustration

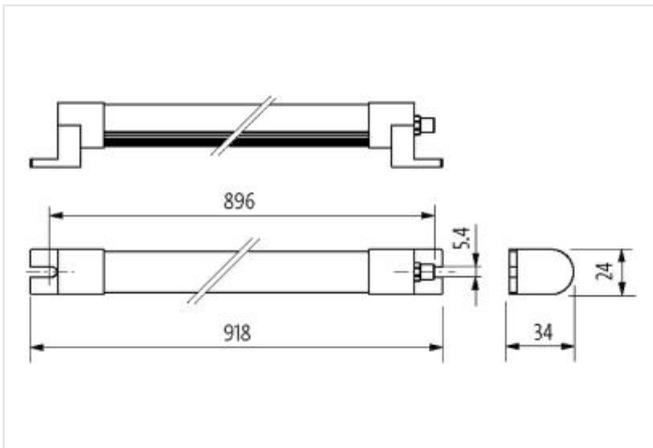

Product may differ from Image



Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M8 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 2520 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Lighting angle	> 120°
Input current	24 W
General data	
Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	Diffuse polystyrene (PS)
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP54
Dimensions H×W×D	34×918×24 mm (1.34×36.14×0.94 in)
Shock load	50 g, 11 ms
Product article number of manufacturer	4000-75800-1715024