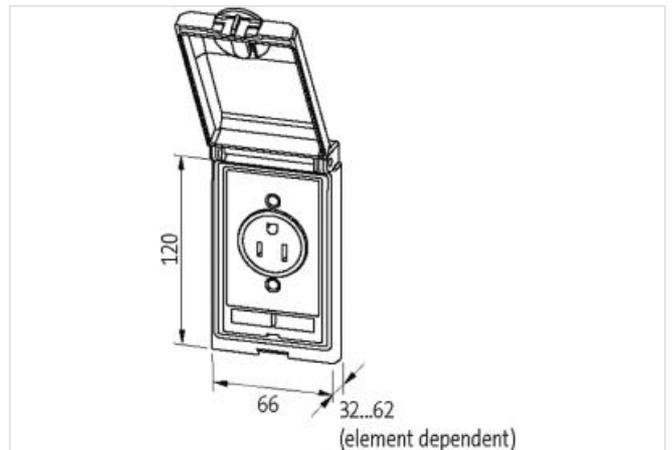


**Modlink MSDD-set: Frame 4000-68113-0000000,**

insert 4000-68000-0250000

**Link to Product****Illustration**

Product may differ from Image

**Frame**

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
Housing	Zinc die-casting, with surface finishing

**SUB-D9**

Operating current (UL Rating)	max. 175 mA
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

Product article number of manufacturer	4000-68113-0250000
--	--------------------