




Reset button with 2 illuminated push buttons

Every 1 NO contact in a IP65 enclosure

R-Button / 42 2NO L M12(8)  
with M12 connection  
8-pole  
2 buttons can be lit (each 1 NO contact)  
Delivery contents:  
Flat lens, transparent clear, red, yellow, green, blue  
Label plates, O, I, R, ↑,↓

Link to Product

Illustration

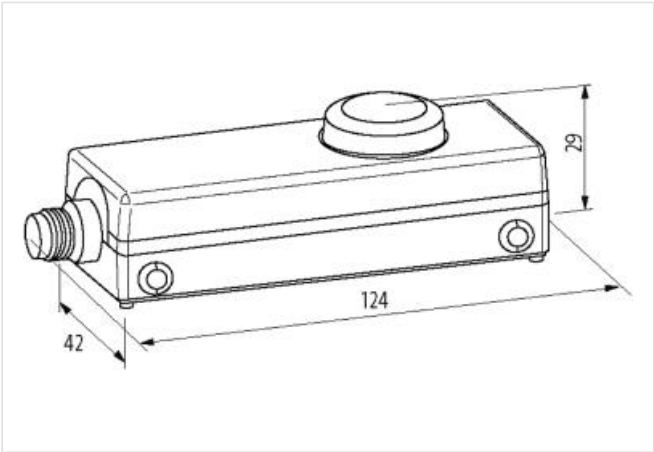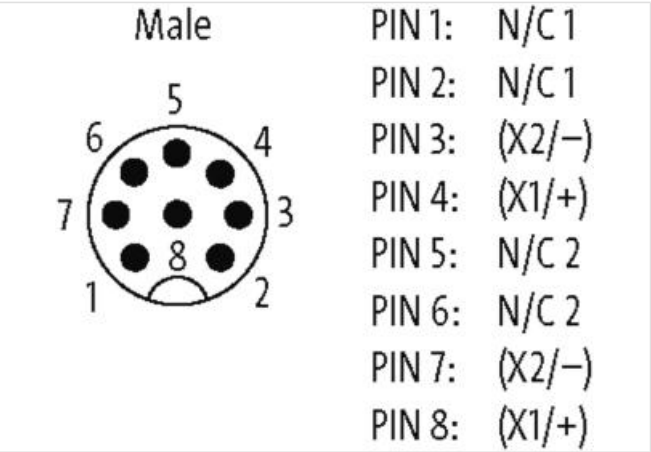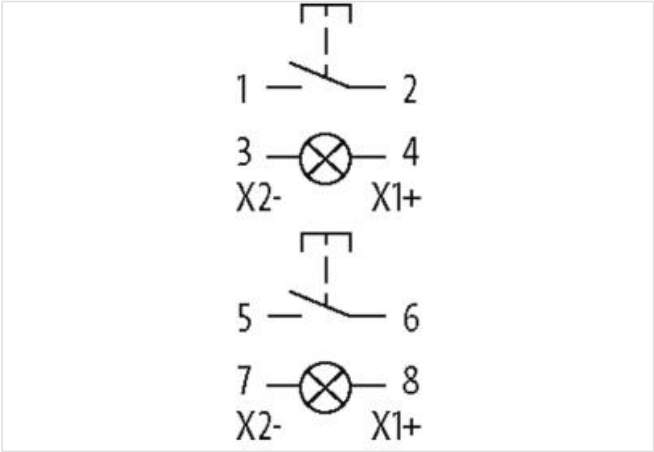

Product may differ from Image

Technical Data	
Operating voltage	1...36 V DC (UR: 30 V DC)
Operating current	1.5 A
Contact bounce time	max. 10 ms
LED Light	max. 30 V AC/DC typ. 14 mA (24 V DC)
General data	
Mounting method	with clip on back
Material (contact)	Ag Ni

Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Mech./ elect. life	1 000 000 operations, load-temperature dependent
Protection	IP65
Connection	M12 (8-pole)
Dimensions H×W×D	29×124×42 mm

**Contact Layout**

PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	(X2/-)
PIN 4	(X1/+)
PIN 5	N/C 2
PIN 6	N/C 2
PIN 7	(X2/-)
PIN 8	(X1/+)

Product article number of manufacturer	69012
--	-------