

## **Emergency stop with 2 positive opening**


contacts in a 42mm enclosure

E-Stop 42 2NC M12(5) with M12 connection 5-pole **Emergency-Stop button** 2 NC (positively-opening)

## **Link to Product**

## Illustration



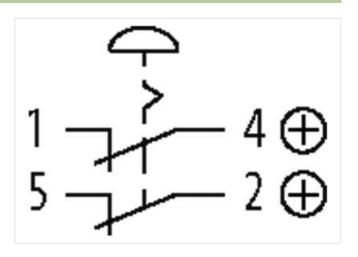

Male


PIN 1: N/C 1

PIN 2: N/C 2

PIN 3: n.c.

PIN 4: N/C1

PIN 5: N/C 2

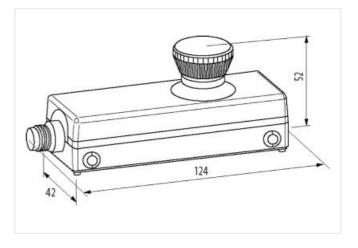

Product may differ from Image





Technical Data		
Operating voltage	24 V AC/DC	
Operating current	2 A	
Contact bounce time	max. 10 ms	
General data		
Mounting method	with clip on back	

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Material (contact)	Ag Ni
Temperature range	-25+70 °C (storage temperature -25+85 °C)
Lambda (d)	20% (N/C)
B10d	250 000
Mech./ elect. life	50 000 actuations, load-temperature dependent
Protection	IP65
Connection	M12 (5-pole)
Dimensions H×W×D	52×124×42 mm
Contact Layout	
PIN 1	N/C 1
PIN 2	N/O 2
PIN 3	n.c.
PIN 4	N/C 1
PIN 5	N/O 2
Product article number of manufacturer	69001