



Emergency-stop pushbutton with 2 positive opening contacts

in a IP65 enclosure


E-Stop 72P 2NC M12(5)
with M12 connection
5-pole
Emergency-Stop button
2 NC (positively-opening)
with protection shroud

Link to Product

Illustration

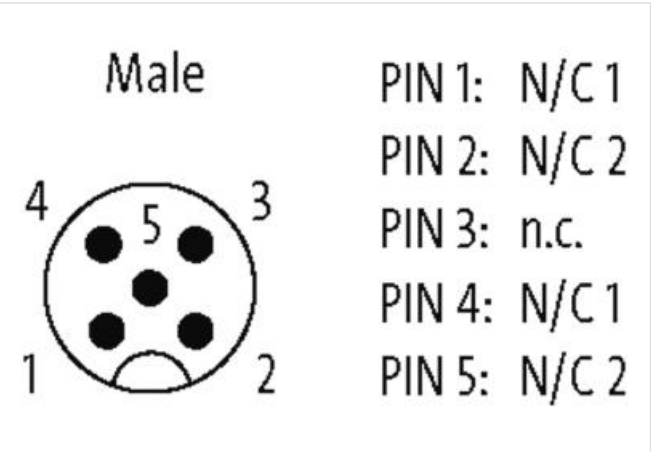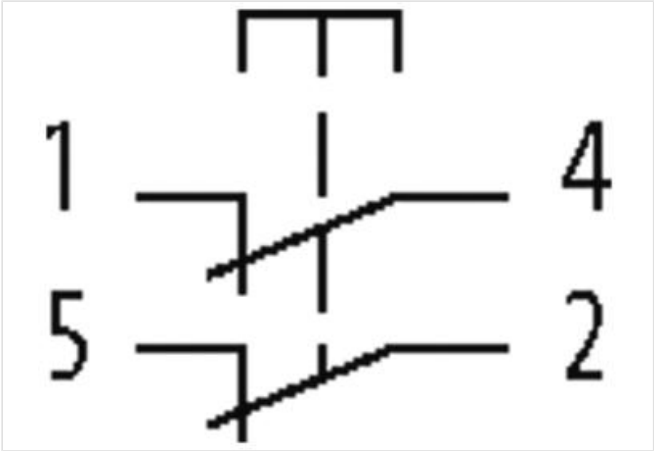

Product may differ from Image

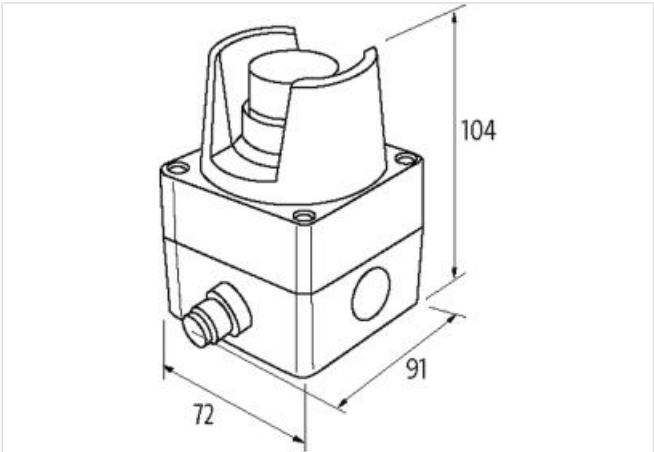

Technical Data	
Contact bounce time	max. 9 ms
Switching capacity	30 A (AC 15); 2.2 A (DC 13)
General data	
Mounting method	screw fixing
Material (contact)	Ag Ni
Temperature range	-25...+60 °C (storage temperature -25...+85 °C)
Lambda (d)	20% (N/C)
B10d	250 000

Mech./ elect. life	1 000 000 operations, load-temperature dependent
--------------------	--

Protection	IP65
------------	------

Connection	M12 (5-pole)
------------	--------------

Dimensions H×W×D	104×72×91 mm
------------------	--------------

Contact Layout

PIN 1	N/C 1
-------	-------

PIN 2	N/C 2
-------	-------

PIN 3	n.c.
-------	------

PIN 4	N/C 1
-------	-------

PIN 5	N/C 2
-------	-------

Utilization category

AC-15	3 A (250 V AC)
-------	----------------

DC-13	2 A (24 V DC)
-------	---------------

Product article number of manufacturer	69042
--	-------