

Emergency stop with 2 positive opening

contacts in a IP65 enclosure

E-Stop / R-B 42 2NC 1NO M12(8)

with M12 connection

8-pole

Emergency-Stop button

2 NC (positively-opening)

1 button (1 NO contact)




Delivery contents:

Flat lens, transparent clear, red, yellow, green, blue

Label plates, O, I, R

Link to Product

Illustration

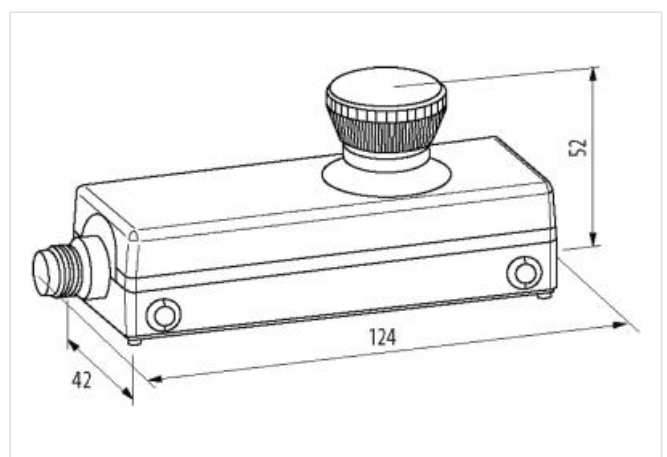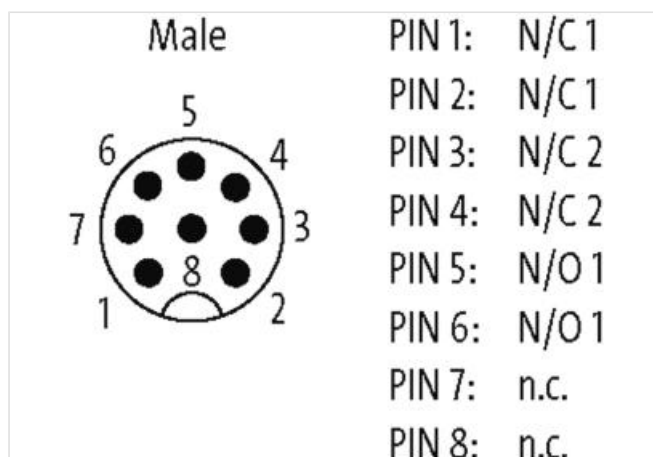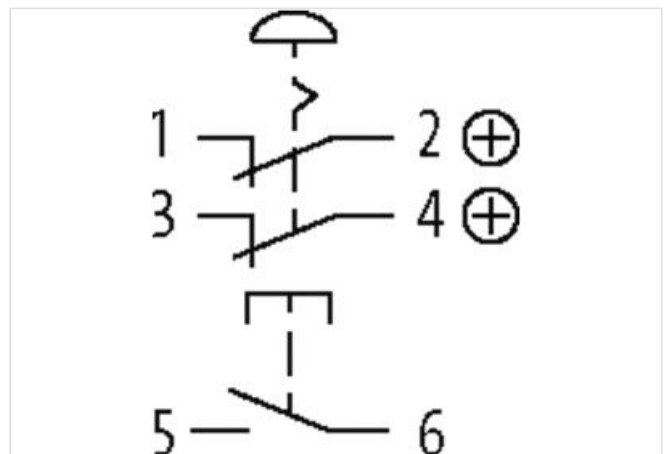

Product may differ from Image



Technical Data

Operating voltage 1...36 V DC; 30 V DC (UL)

Operating current	1.5 A
Contact bounce time	max. 10 ms

General data

Mounting method	with clip on back
Material (contact)	Ag Ni
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Lambda (d)	20% (N/C)
B10d	250 000
Mech./ elect. life	50 000 actuations, load-temperature dependent
Protection	IP65
Connection	M12 (8-pole)
Dimensions H×W×D	52×124×42 mm

Contact Layout

PIN 1	Emergency-Stop: NC-1
PIN 2	Emergency-Stop: NC-1
PIN 3	Emergency-Stop: NC-2
PIN 4	Emergency-Stop: NC-2
PIN 5	Button: N/O 1
PIN 6	Button: N/O 1
PIN 7	Button: n.c.
PIN 8	Button: n.c.

Product article number of manufacturer	69003
--	-------