



Emergency stop with 2 positive opening

contacts in a 42mm enclosure


E-Stop 42 2NC M12(4)  
with M12 connection  
4-pole  
Emergency-Stop button  
2 NC (positively-opening)

Link to Product

Illustration

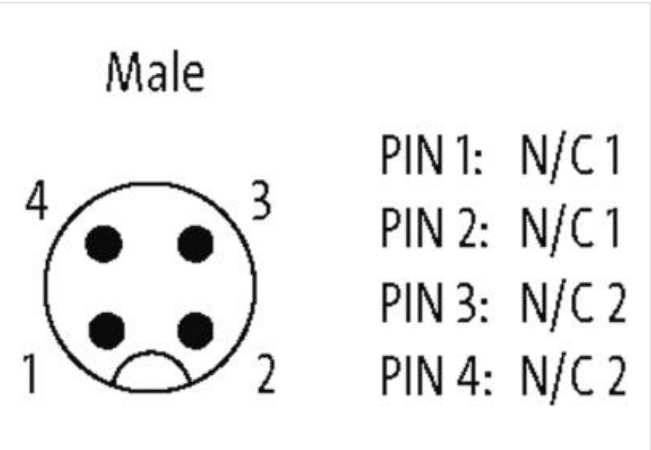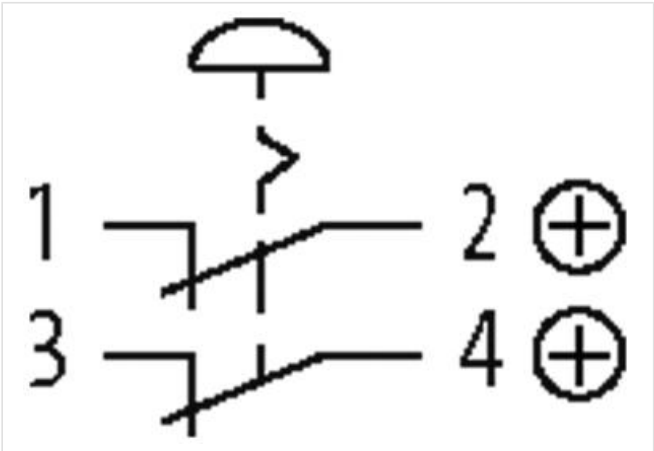

Product may differ from Image

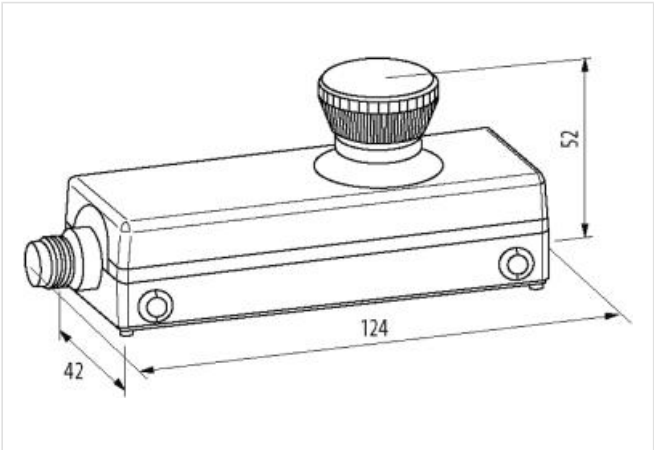

Technical Data

Contact bounce time	max. 10 ms
Switching capacity	15 A (AC 15); 2.2 A (DC 13)

General data

Mounting method	with clip on back
-----------------	-------------------

Material (contact)	Ag Ni
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Lambda (d)	20% (N/C)
B10d	250 000
Mech./ elect. life	50 000 actuations, load-temperature dependent
Protection	IP65
Connection	M12 (4-pole)
Dimensions H×W×D	52×124×42 mm
<b>Contact Layout</b>	
PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	N/C 2
PIN 4	N/C 2
<b>Utilization category</b>	
AC-15	1.5 A (240 V AC)
DC-13	2 A (24 V DC)
Product article number of manufacturer	69000