

## Modlight Illumix Classic Line 6W


LED machine lamp, IP67, 24VDC, M12 connection

Modlight Illumix Classic Line

6 W

### Link to Product

#### Illustration

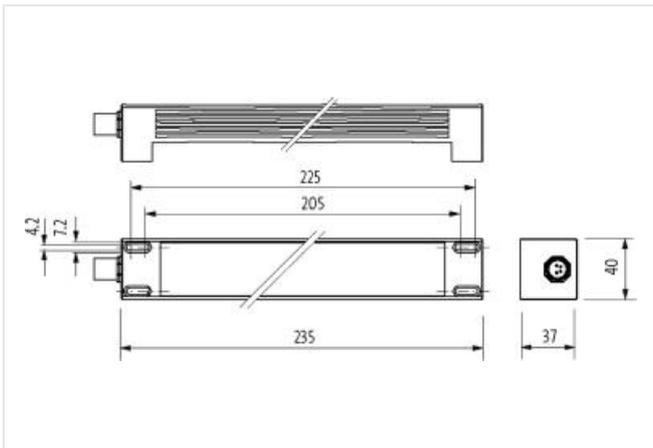

Product may differ from Image



#### Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M12 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 630 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Lighting angle	> 120°
Input current	6 W

**General data**

Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	diffuse single-pane safety glass (ESG), 4 mm
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP67
Dimensions H×W×D	37×235×40 mm (1.46×9.25×1.57 in)
Shock load	50 g, 11 ms

Product article number of manufacturer	4000-75801-1415006
--	--------------------