




Illuminated Emergency-stop pushbutton with 2 positive opening contacts

in a IP65 enclosure

E-Stop 72 2NC L M12(8)
with M12 connection
8-pole
Emergency-Stop button
2 NC (positively-opening)
LED-Ring can be lit

Link to Product

Illustration

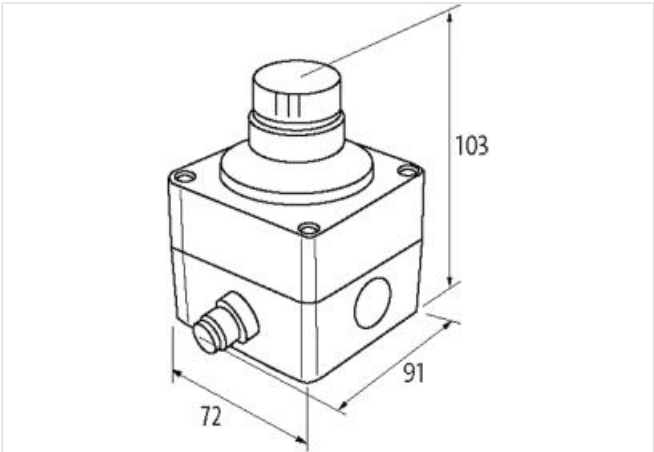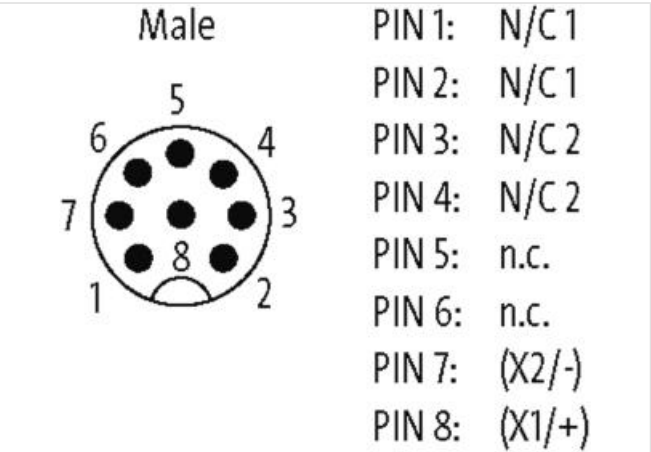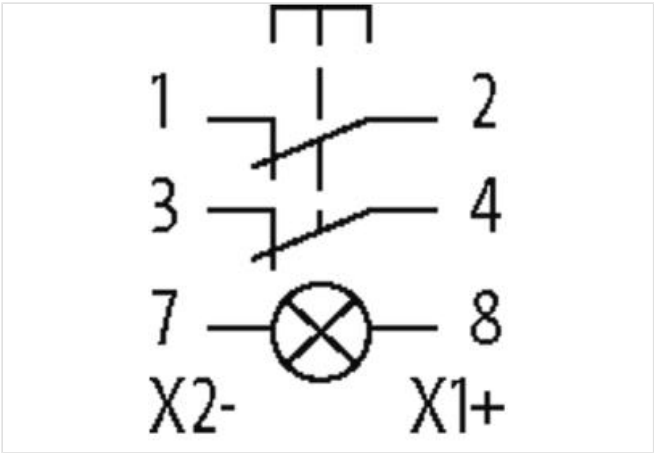

Product may differ from Image

Technical Data	
Contact bounce time	max. 9 ms
Switching capacity	30 A (AC 15); 2.2 A (DC 13)
LED Light	12...30 V AC/DC typ. 15 mA (24 V AC/DC)
General data	
Mounting method	screw fixing
Material (contact)	Ag Ni
Temperature range	-25...+60 °C (storage temperature -25...+85 °C)
Lambda (d)	20% (N/C)

B10d	250 000
Mech./ elect. life	1 000 000 operations, load-temperature dependent
Protection	IP65
Connection	M12 (8-pole)
Dimensions H×W×D	103×72×91 mm

Contact Layout

PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	N/C 2
PIN 4	N/C 2
PIN 5	n.c.
PIN 6	n.c.
PIN 7	(X2/-)
PIN 8	(X1/+)

Utilization category

AC-15	3 A (250 V AC)
DC-13	2 A (24 V DC)

Product article number of manufacturer	69043
--	-------