

Mini (7/8) 4 pole, Male (Ext.) 90° w/ Cable

PUR 4x1.5 (4x16AWG) bk UL/CSA

Male 90°

7/8"

4-pole

Power cable

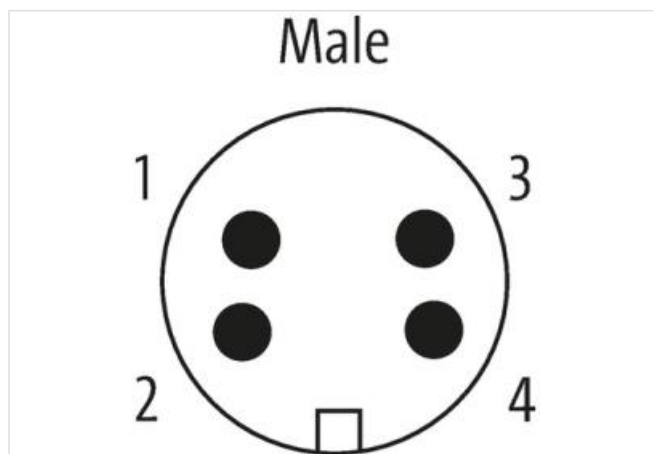
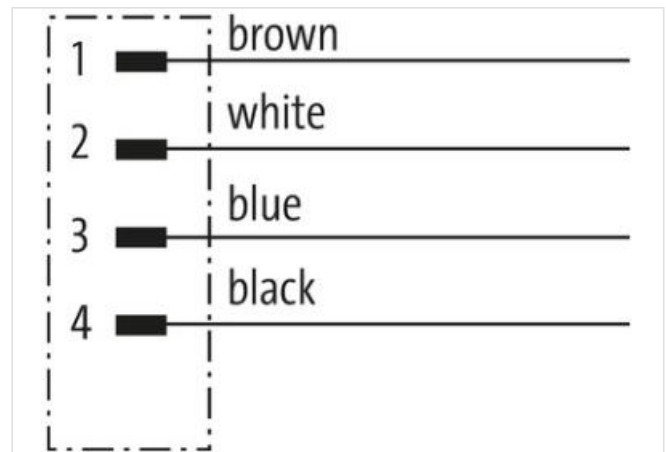
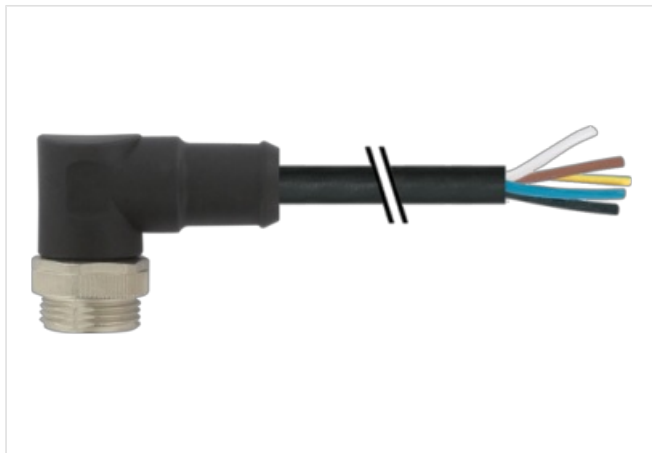
USA

without cable sleeves


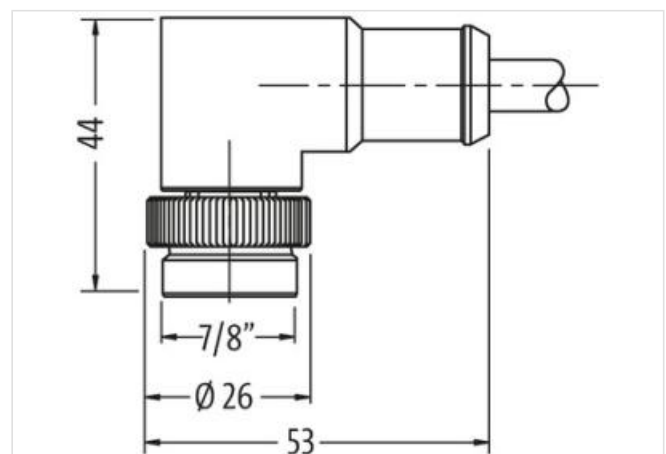
Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image



* only for products with UL/CSA approved cable

Form

Form

A4011

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-14

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Technical Data	
Operating voltage	max. 600 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 9 A
No. of poles	4
LED display	no
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP68 inserted and tightened (EN 60529)
Material	PUR
Locking material	Zinc die casting, matte nickel plated
Compression gland	7/8" (SW24)
General data	
Mounting method	inserted, tightened
Pollution Degree	3
Temperature range	-25...+80 °C, depending on cable quality
Cables	
No./diameter of wires	4x 1.5 mm ²
Wire isolation	TPM (br, wh, bl, bk)
C-track properties	5 Mio.
Outer Ø	8.0 mm ±5%
Cable number	UMC
Construction (core)	2.3 mm ±5%
Jacket Color	black
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-20...+80 °C
Bend radius (fixed)	7.5x outer Ø
Bend radius (moving)	10x outer Ø
Material (jacket)	PUR (UL/CSA)
Product article number of manufacturer	7700-A4011-UMC0150
Cable length	1,5 m