

Valve plug SuperSeal male with cable

PUR 3x0.75 bk 5m

Xtreme - Outdoor

Female straight

max. 24 V DC

3-pole

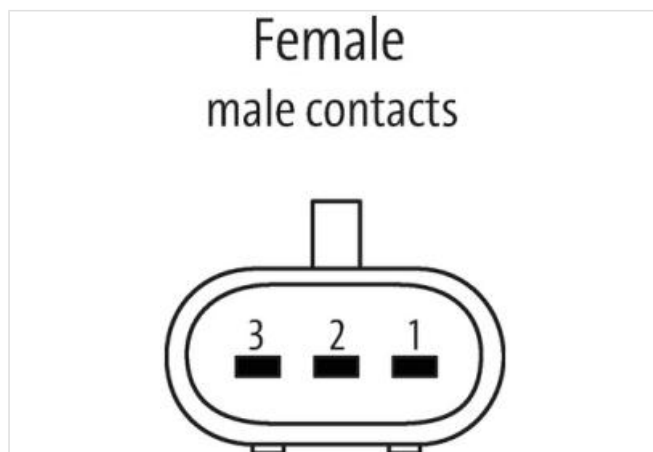
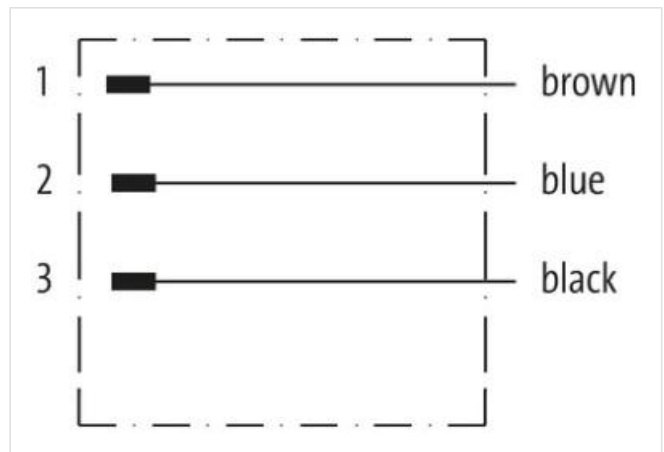
without components

without cable sleeves

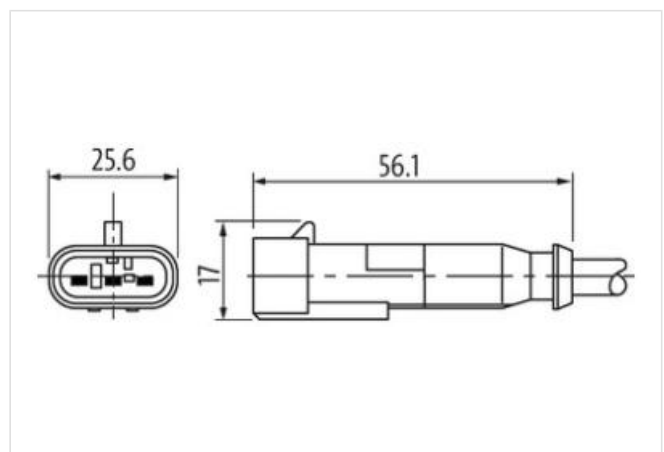
Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 73381

Technical Data

Operating voltage	max. 24 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 8 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-14

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

No. of poles	3-pole
LED display	no
Locking of ports	Snap-in connector
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
suitable for corrugated tube (internal Ø)	11 mm
Housing	AMP SuperSeal 1.5, black plastic
Additional suppressor	without components

General data

Mounting method	inserted
Material (contact)	Copper alloy
Material (contact surface)	Sn
Material (gasket)	Silicon
Pollution Degree	3
Temperature range	-40...+125 °C, depending on cable quality

Cables

No./diameter of wires	3× 0.75 mm ²
Wire isolation	PP (br, bl, bk)
C-track properties	4 Mio.
Outer Ø	5.3 mm ±5%
Cable number	513
Jacket Color	black
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-25...+80 °C
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL)

Product article number of manufacturer	7072-73381-5130500
Cable length	5 m