



M8 female 0° A-cod. screw terminal

4-pol., 0,14 - 0.5mm², 2,5 - 5mm


Female straight
M8, 4-pole
Screw terminal
Connection cross section: 0.14...0.5 mm²

[Link to Product](#)

Illustration

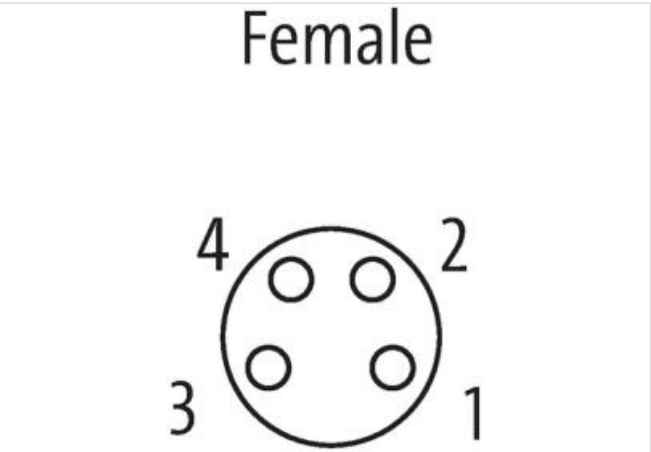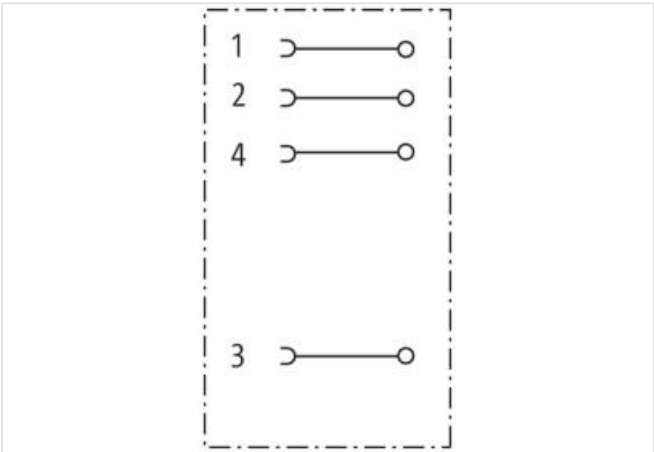

Product may differ from Image

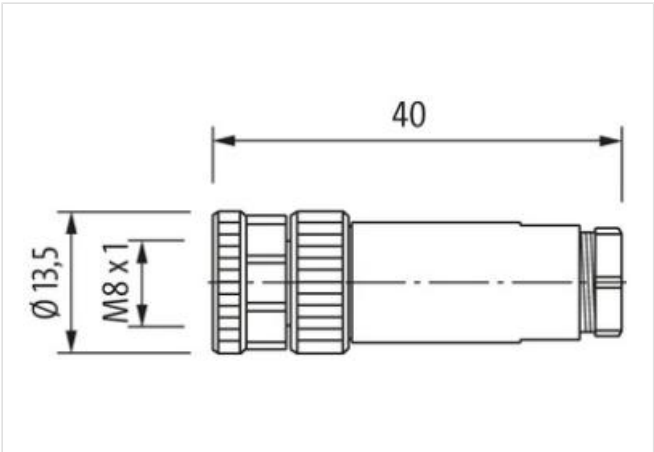

Form	
Form	08631
Technical Data	
Operating voltage	max. 50 V AC/60 V DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A

No. of poles	4-pole
Material group	III
Coding	A-coded
Connection cross section	0.14...0.5 mm ²
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Compression gland	M8 (AF12,5)
Isolation resistance	> 100 MOhm
Over voltage category	II

General data

Material (contact)	Brass, gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PBT
Material (contact carrier)	PA66
Connection	Screw terminal
Dimensions H×W×D	45×12×12 mm

Product article number of manufacturer	7000-08631-0000000
--	--------------------