



M12 female 0° A-cod. screw terminal

4-pol., 0,14 - 1,5mm², 2,5 - 8mm


Female straight
M12, 4-pole
Screw terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

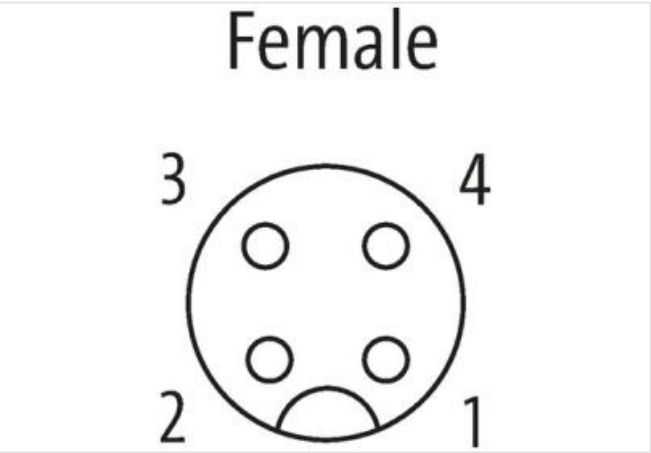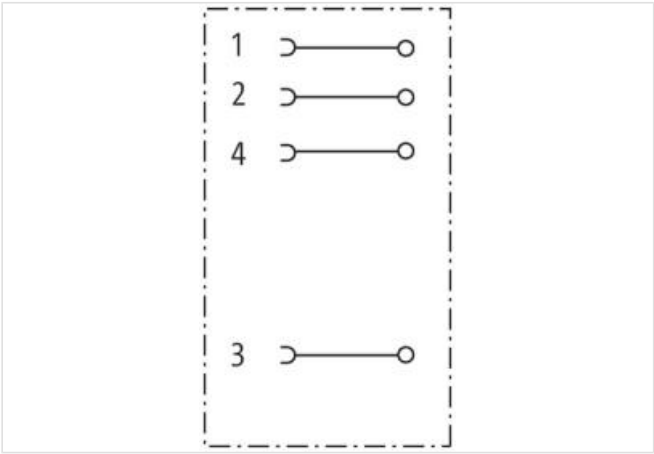

Product may differ from Image

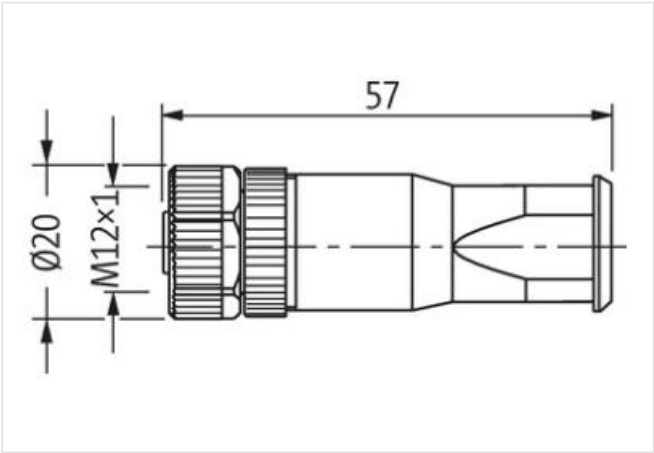

Technical Data	
Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 7.5 A (+40 °C; 1.5 mm²)
Mating cycles	≥ 100
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm
Connection cross section	0.14...1.5 mm²

Sealing range (cable Ø)	2.5...8.0 mm
Protection	IP67 mounted and tightened
Isolation resistance	≥ 100 MΩ
General data	
Pollution Degree	3/2
Temperature range	-30...+85 °C
Dimensions H×W×D	57×20×20 mm
Product article number of manufacturer	7000-12934-0000000