

**M12 male 90° A-cod. screw terminal V4A**5-pol., max. 0,75mm<sup>2</sup>, 6 - 8mm

Male 90°

M12, 5-pole

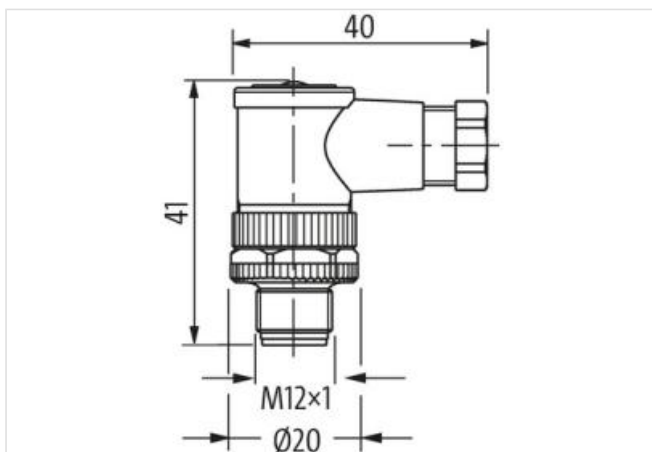
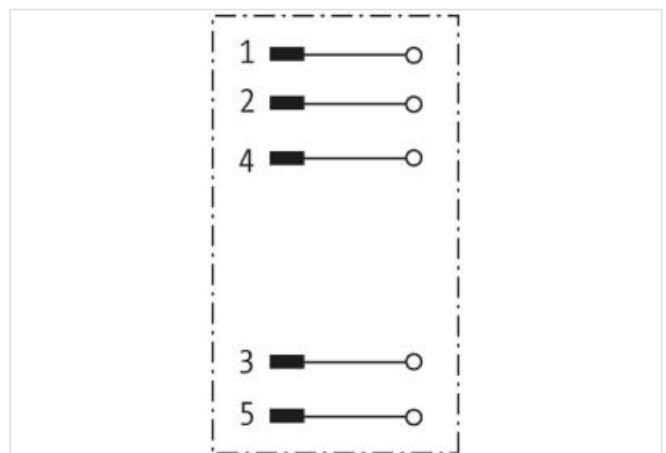
Screw terminals

Sealing range (cable Ø): 6...8 mm

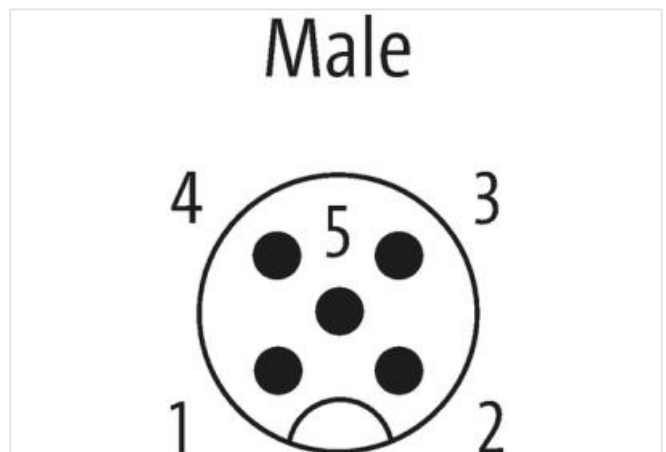
Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Link to Product](#)****Illustration**

Product may differ from Image

**Form**

Form 12881

**Technical Data**

Operating voltage max. 60 V

Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A; max. 3 A (UL-Recognized)
Material group	III
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Stainless steel 1.4404 (V4A)
Compression gland	M12 (SW18)
Over voltage category	II

**General data**

Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PA
Dimensions H×W×D	41x40x20 mm

Product article number of manufacturer	7004-12881-0000000
--	--------------------