

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24V LED+Z-Diode PG9

Form A (18 mm)

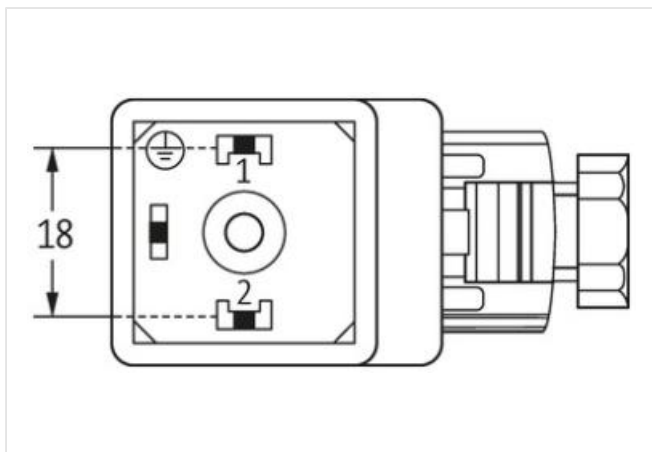
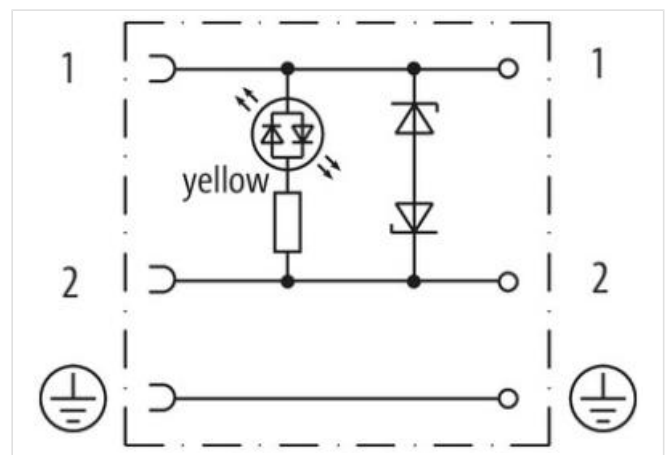
LED and Z-diode

24 V AC $\pm 20\%$ / DC $\pm 25\%$

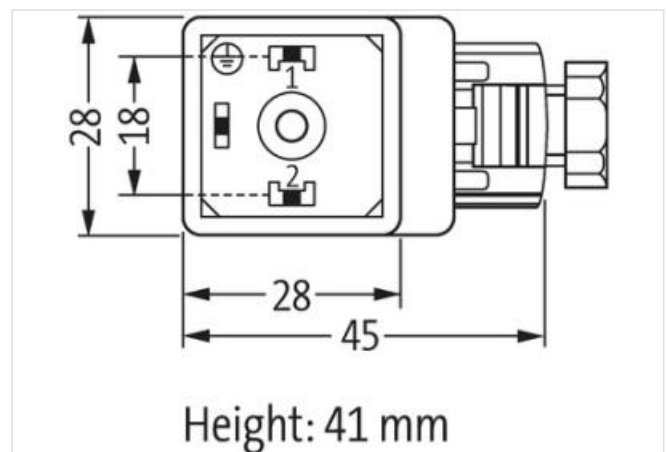
PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Form**

Form 29021

Technical Data

Operating voltage 24 V AC/DC

Operating current per contact max. 4 A

LED display	yellow
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Configuration	2 contacts + PE

General data

Temperature range	-20...+60 °C
Product article number of manufacturer	7000-29021-0000000