



M12 male 0° A-cod. screw terminal

5-pol., max. 0,75mm², 4 - 6mm, shielded


Male straight
M12, 5-pole
shielded
Screw terminals
Sealing range (cable Ø): 4...6 mm

[Link to Product](#)

Illustration

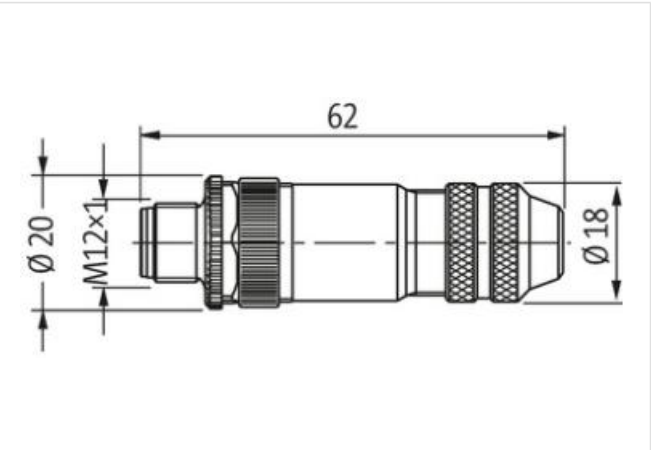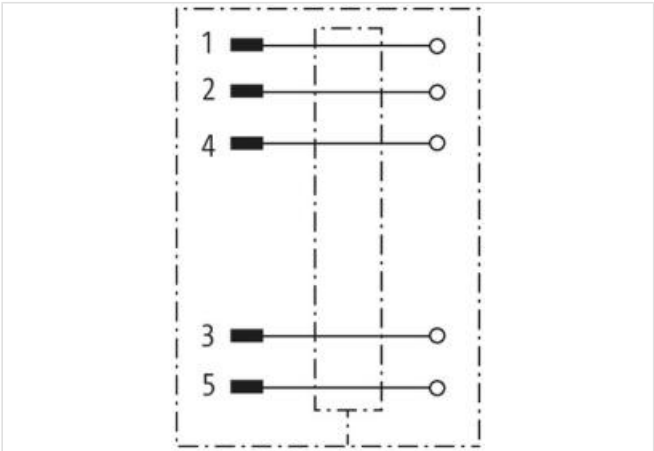

Product may differ from Image

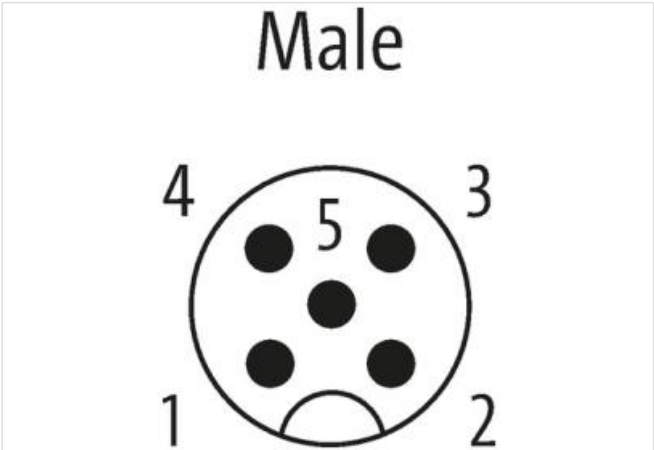

Form

Form 13301

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range -40...+85 °C

Product article number of manufacturer 7000-13301-0000000