



**M12 female 90° A-cod. screw terminal**

4-pol., 0,14 - 1,5mm², 2,5 - 8mm


Female 90°  
M12, 4-pole  
Screw terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

**Link to Product**

**Illustration**

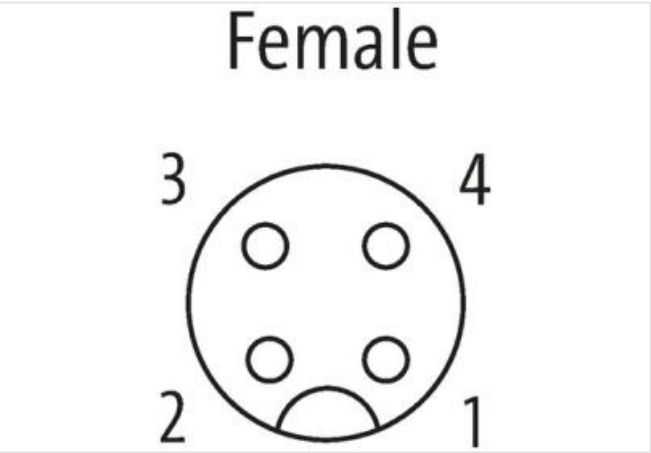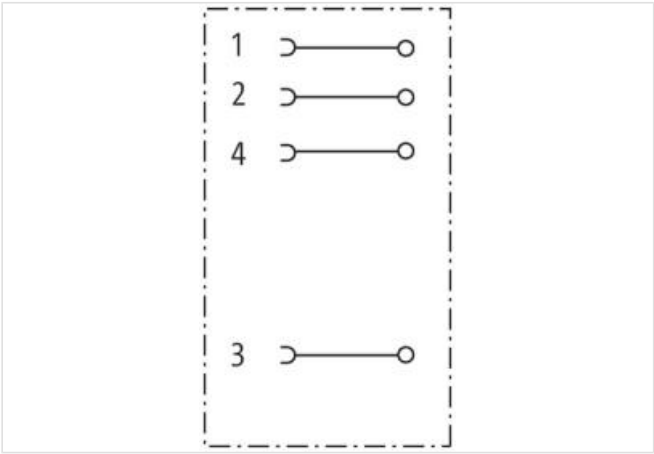

Product may differ from Image

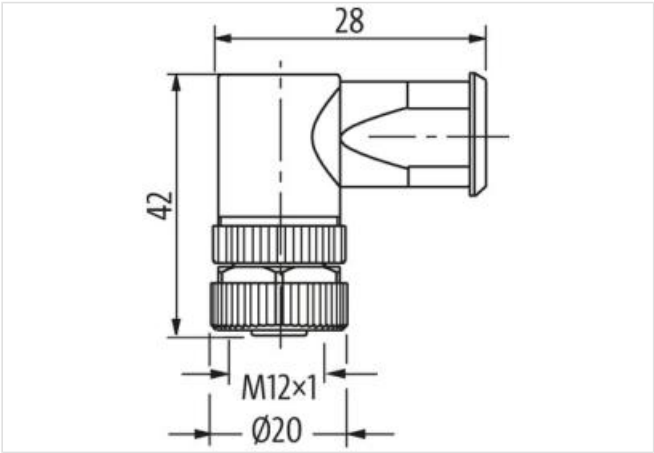

Technical Data	
Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 7.5 A (+40 °C; 1.5 mm²)
Mating cycles	≥ 100
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm
Connection cross section	0.14...1.5 mm²

Sealing range (cable Ø)	2.5...8.0 mm
Protection	IP67 mounted and tightened
Isolation resistance	≥ 100 MΩ

**General data**

Pollution Degree	3/2
Temperature range	-30...+85 °C
Dimensions H×W×D	42×28,5×20 mm

Product article number of manufacturer	7000-13014-0000000
--	--------------------