



M12 male 0° A-cod. screw terminal

8-pol., max. 0.5mm², 6 - 8mm


Male straight
M12, 8-pole
Screw terminals
Sealing range (cable Ø): 6...8 mm
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

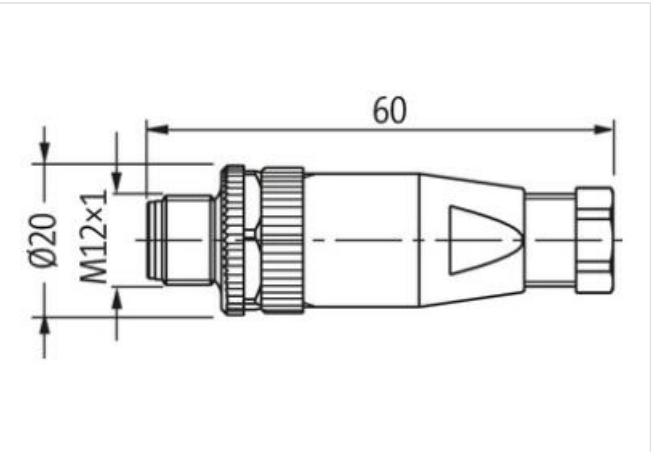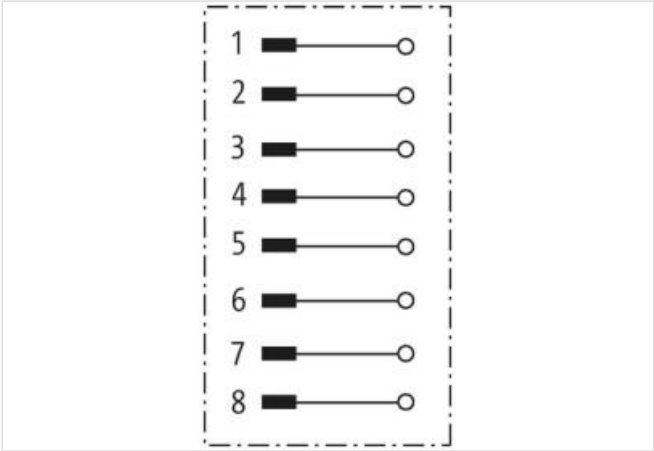

Product may differ from Image

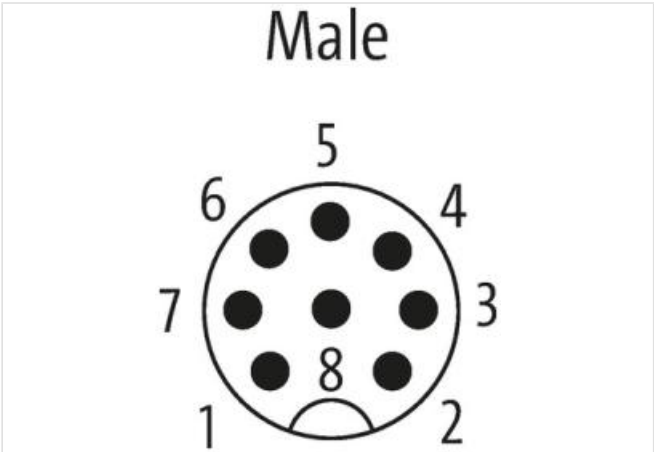

Form

Form 17302

Technical Data

Operating voltage	max. 30 V
Operating current per contact	max. 2 A

No. of poles	8-pole
Coding	A-coded
Connection cross section	max. 0.5 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Copper alloy
Compression gland	M12 (0.6 Nm, SW18)
Isolation resistance	≥ 100 MΩ
Contact resistance	≤ 8 mΩ
Over voltage category	II

General data

Material (contact)	Copper alloy
Material (contact surface)	gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PBT GF
Connection	Screw terminal

Product article number of manufacturer	7000-17302-0000000
--	--------------------