

M12 Power female 90° T-cod. screw terminal4-pol., max. 2,5mm², 8 - 10mm

Female 90°

M12, 4-pole

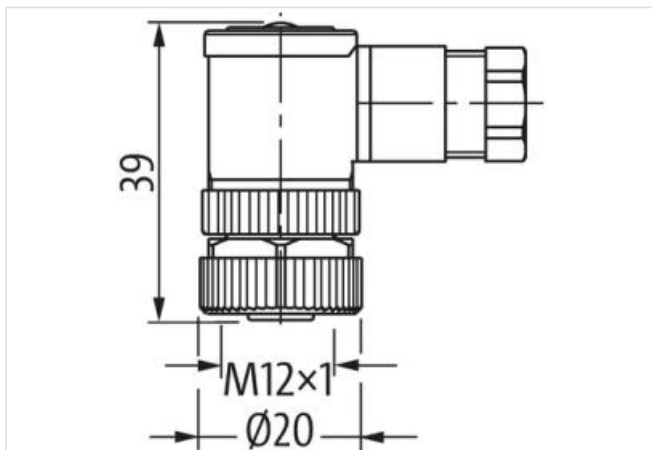
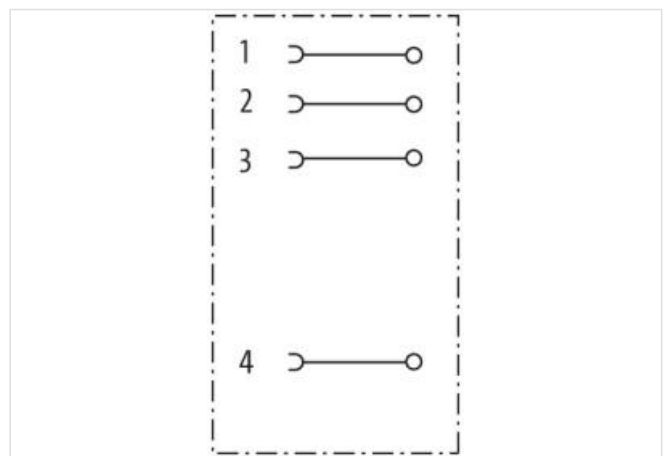
T-coded

Screw terminals

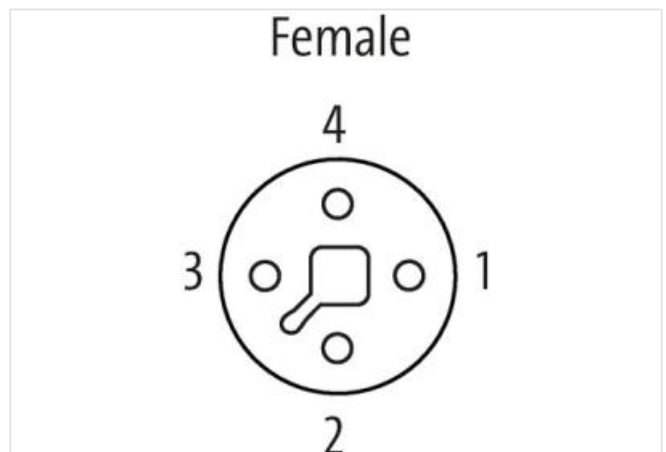
Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 63 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 12 A

Material group	IEC 60664-1, category III
Coding	T-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	8...10 mm
Protection	IP67 inserted and tightened (EN 60529)
Material	PA
Compression gland	M12 (SW18)
Over voltage category	III

General data

Pollution Degree	3
Temperature range	-40...+85 °C

Product article number of manufacturer	7000-P7421-0000000
--	--------------------