

**MQ15-X-Power male 0° crimp connection**



6-pol., 0,37 - 2,5mm², 6 - 13mm

MQ15 X-Power  
Male straight  
field-wireable

Both 1.5mm² (7000-P8911-0000000) and 2.5mm² (7000-P8913-0000000) crimp contacts can be used depending on the selected cable.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

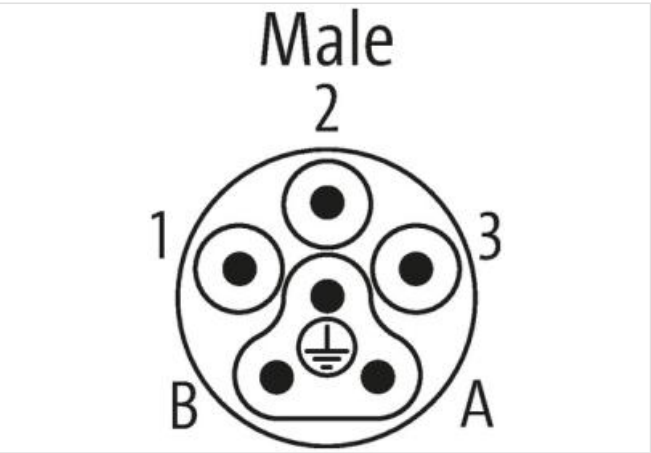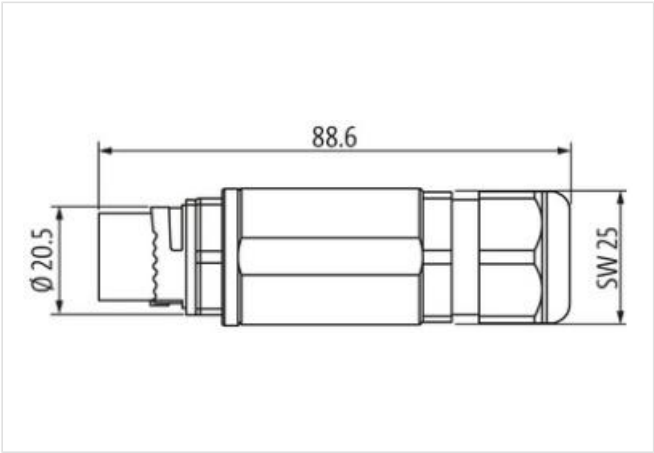

Product may differ from Image

Technical Data	
Operating voltage	max. 600 V AC (Power); max. 63 V AC/DC (Signal)
Rated surge voltage	6.0 kV
Operating current per contact	max. 16 A (Power); max. 10 A (Signal)
No. of poles	6
Connection	Crimp
Connection cross section	0.37...2.5 mm²

Sealing range (cable Ø)	6...13 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	PA
Over voltage category	3

**General data**

Material (contact)	Copper alloy
Material (gasket)	NBR
Pollution Degree	3
Temperature range	-40...+70 °C
Material (housing)	PA

Product article number of manufacturer	7000-P8501-0000000
--	--------------------