

**M12 male 0° C-cod. IDC**3-pol., max. 0,75mm<sup>2</sup>, 4 - 6mm

Male straight



M12, 3-pole

Sealing range (cable Ø): 4...6 mm



Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

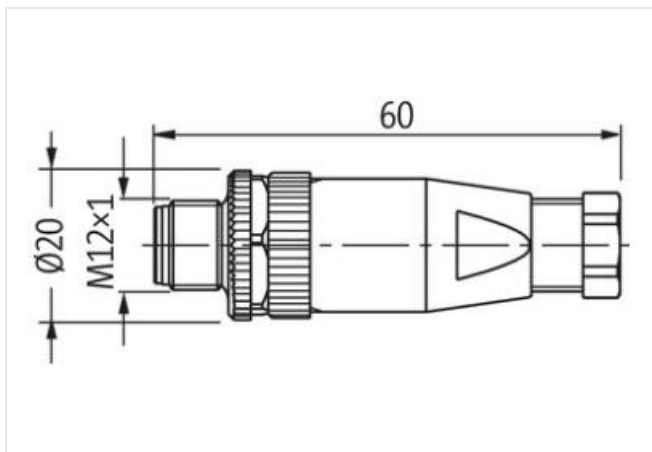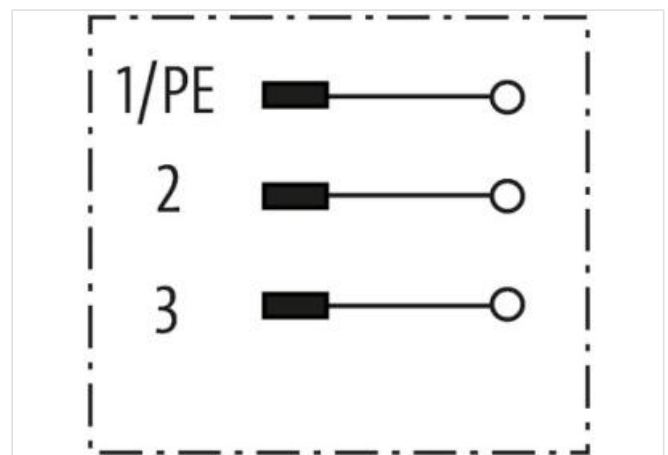**[Link to Product](#)****Illustration**

Product may differ from Image

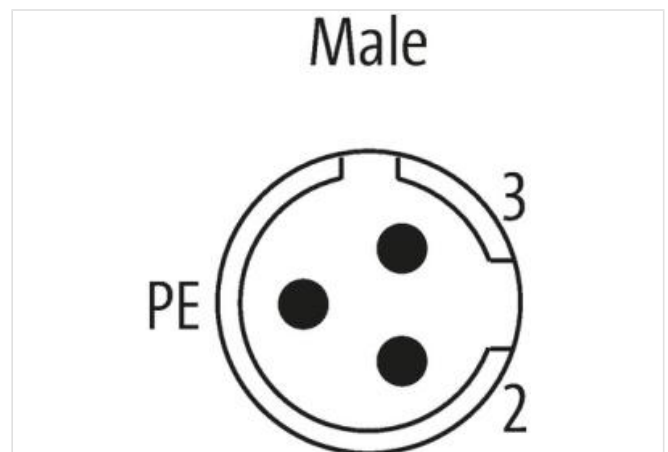

\* only for products with UL/CSA approved cable

**Form**

Form 20041

**Technical Data**

Operating voltage max. 250 V AC/DC

Rated surge voltage 2.5 kV

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Operating current per contact	max. 4 A
Material group	IEC 60664-1, category II
Coding	M12, C-coded
Connection cross section	max. 0.75 mm <sup>2</sup>
Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Material	PA

**General data**

Pollution Degree	3
Temperature range	-25...+85 °C
Dimensions H×W×D	62×20×20 mm

Product article number of manufacturer	7000-20041-0000000
--	--------------------