

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

110V LED+VDR PG9

Form A (18 mm) 110 V AC/DC ±10% LED and VDR PG9


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







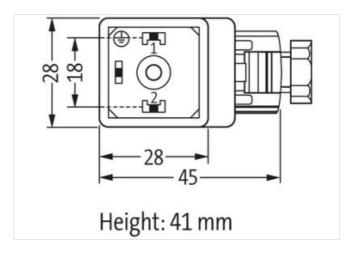

Product may differ from Image





Form 29101

Technical Data

Operating voltage 110 V AC/DC ±10%

Operating current per contact max. 1 A

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Configuration	2 contacts + PE
General data	
Temperature range	-20+60 °C
Product article number of manufacturer	7000-29101-0000000