



T-Coupler Slimline M12 male/ 2x M8 female A-cod.

4-pol. / 2x 3-pol.


T-coupler (Slim Line)
Male straight – females straight
M12 – M8, 4-pole
Distribution function (NO)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

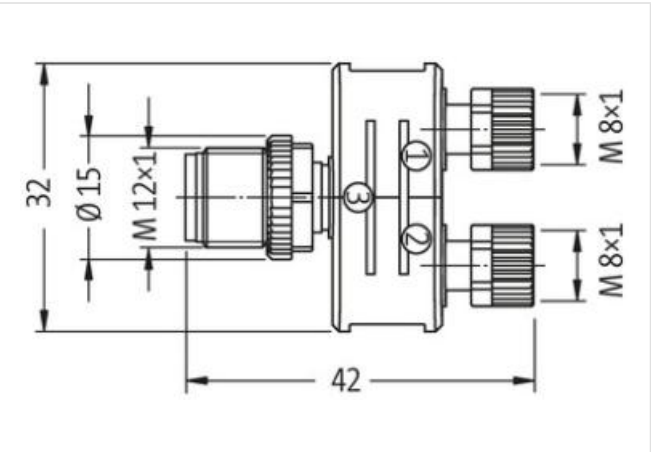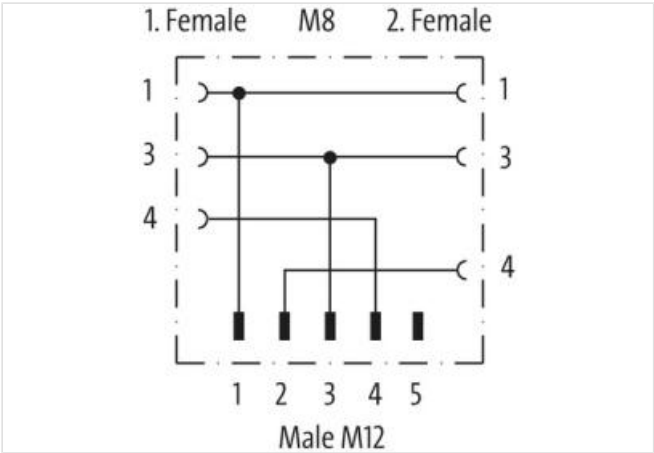

Product may differ from Image

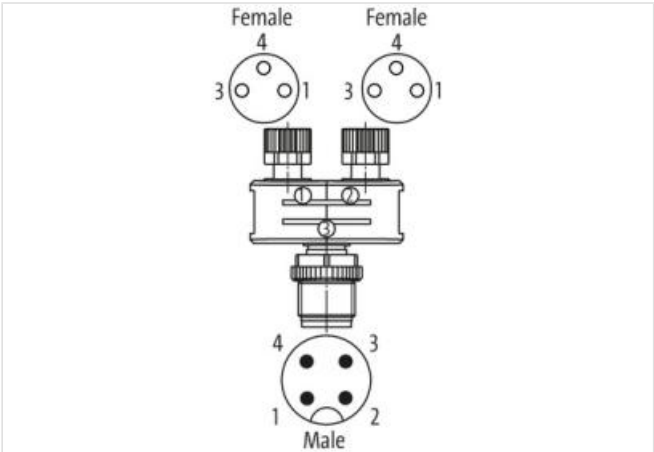

Form

Form 41211

Technical Data

Operating voltage	max. 60 V AC/DC
Rated surge voltage	1.5 kV

Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)

General data

Temperature range	-25...+85 °C
Product article number of manufacturer	7000-41211-0000000