

T-Coupler M12 male / M12 female A-cod. Lite

5-pol. / 2x 4-pol.

T-coupler

Male straight – females straight

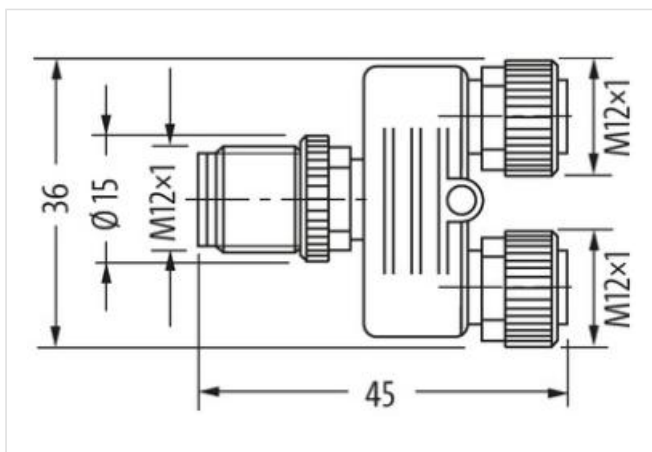
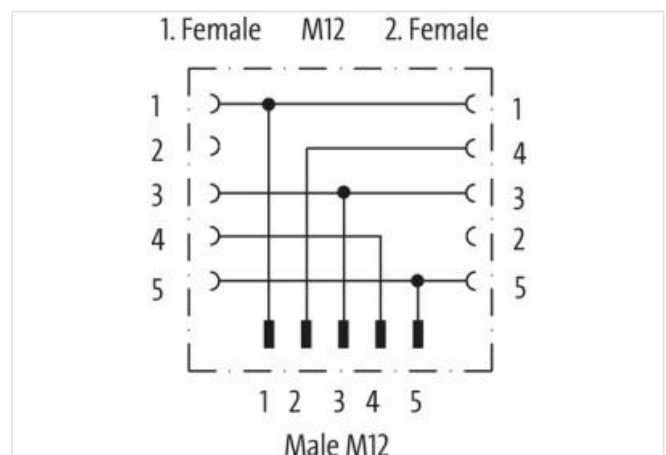
M12 – M12, 5-pole

Distribution function (NO)

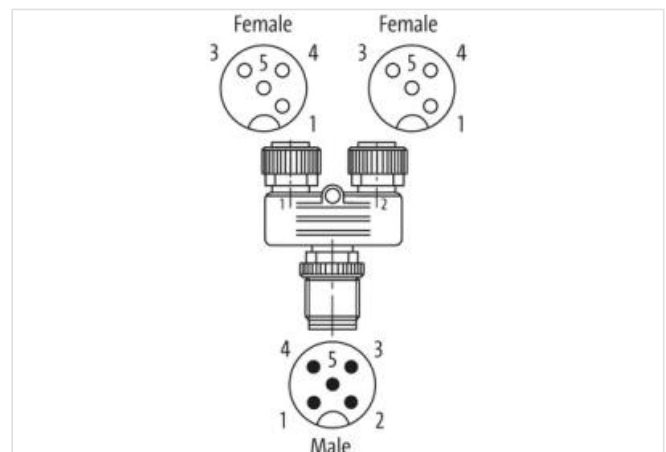
7005 - plastic hexagonal screw (M12 Lite)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 41121

Technical Data

Operating voltage max. 60 V AC/DC

Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Black plastic

General data

Temperature range	-25...+85 °C
Product article number of manufacturer	7005-41121-0000000