



M12 female recept. A-cod. front F&B Pro

PP-wires 5x0.34 0.2m


F&B Pro
Flange female
M12, 5-pole
Front mounting
Stainless steel 1.4404 (V4A)
IP69K
Further cable lengths on request.

Link to Product

Illustration

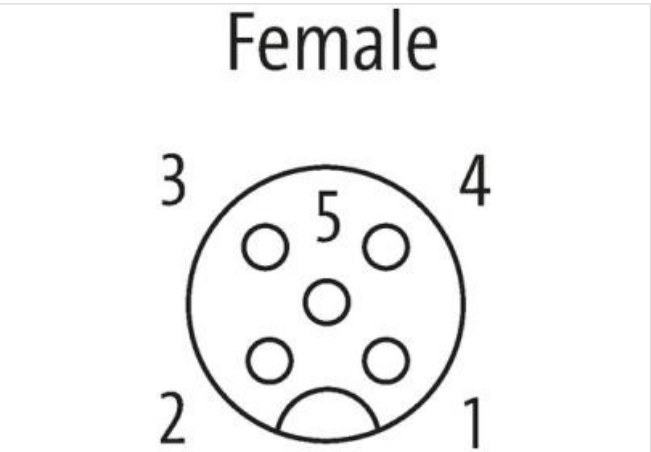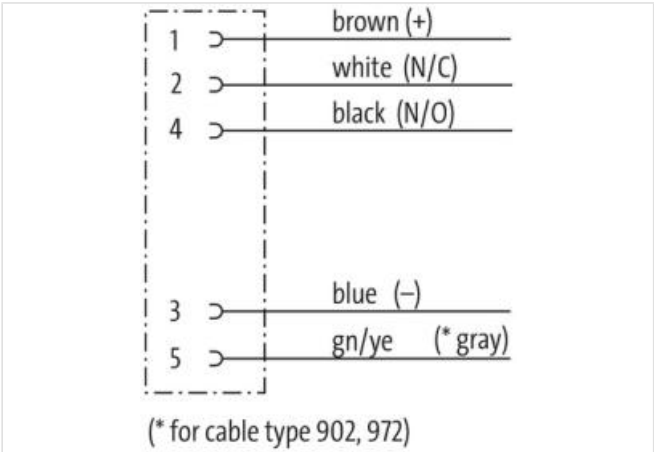

Product may differ from Image

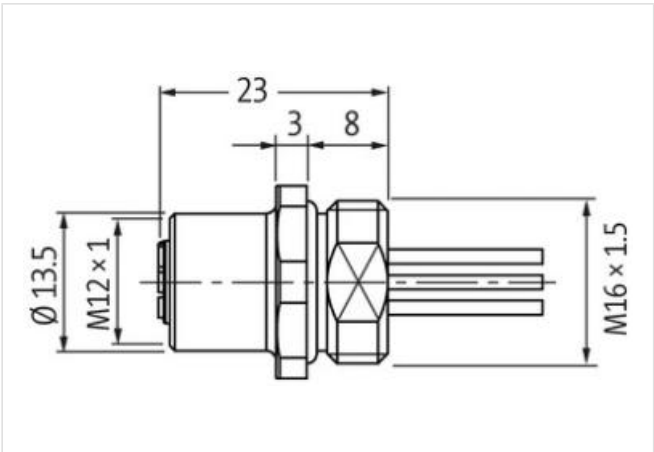

Form

Form 13561

Technical Data

Operating voltage max. 125 V AC/DC

Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
No. of poles	5
Material group	IEC 60664-1, category I
Coding	A-coded
LED display	no
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67, IP69K inserted
Locking material	Stainless steel 1.4404 (V4A)
Compression gland	M12 (SW14)

General data

Pollution Degree	3
Temperature range	-40...+105 °C, depending on cable quality

Cables

No./diameter of wires	5× 0.34 mm ²
Wire isolation	PUR (br, wh, bl, bk, gr)
Outer Ø	1.3 mm ±5%
Cable number	972
Material (wire)	Cu wire, tin plated
Resistor (core)	max. 58 Ω/km (20 °C)
Nominal voltage	300 V AC
Test voltage	1500 V AC
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C

Product article number of manufacturer	7024-13561-9720020
Cable length	0,2 m