


Cable drum Ø 355mm

PVC 4x0.25 shielded gy 100m

Cable drum (100 m)
PVC
4× 0.25 mm², grey

[Link to Product](#)

Illustration

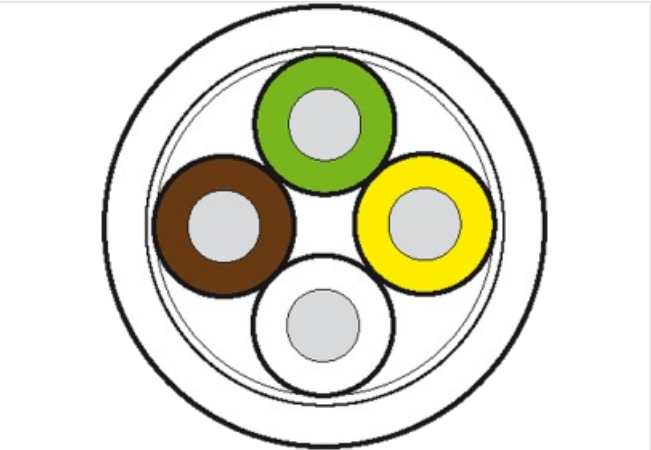

Product may differ from Image



Cables	
Cable identification	275
Cable Type	1 (PVC)
Approval (cable)	CE conform
Cable weight [g/m]	38,5 g
Material (wire)	Cu wire, bare
Resistor (core)	max. 79 Ω/km (20 °C)
Single wire Ø (core)	0.15 mm
Construction (core)	14× 0.15 mm (multi-strand wire class 5)
Diameter (core)	4× 0.25 mm²
AWG	similar to AWG 24
Material (wire isolation)	PVC
Material property (wire isolation)	CFC-, cadmium-, silicone- and lead-free
Wire-Ø incl. isolation	1.25 mm ±5%
Stranding combination	4 wires twisted
Shield	yes
Shield (Type)	Copper braid
Material (jacket)	PVC
Material property (jacket)	CFC-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant
Shore hardness (jacket)	85 ±5 A
Outer-Ø (jacket)	4.6 mm ±5%
Color (jacket)	gray

Jacket Color	gray
chemical resistance	good resistance to oil, gasoline and chemicals
Nominal voltage	250 V AC
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	20× outer Ø
Product article number of manufacturer	7000-C0201-2750000