

"T-Coupler 7/8"" male / 2x 7/8"" female"

3-pol.

T-coupler

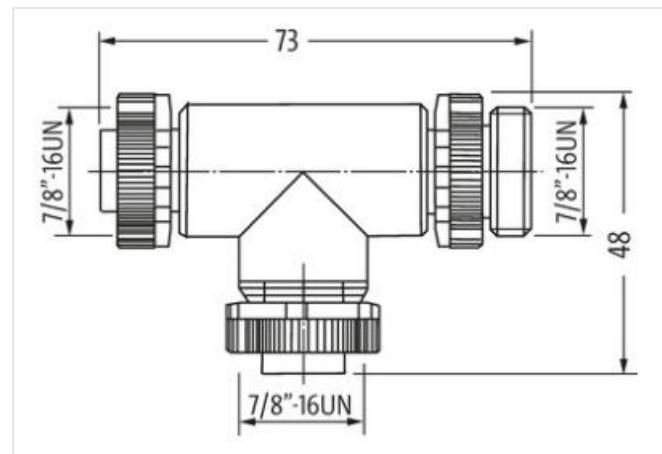
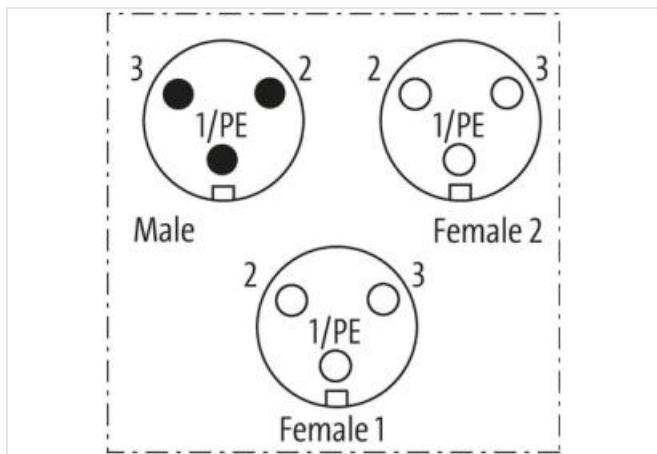
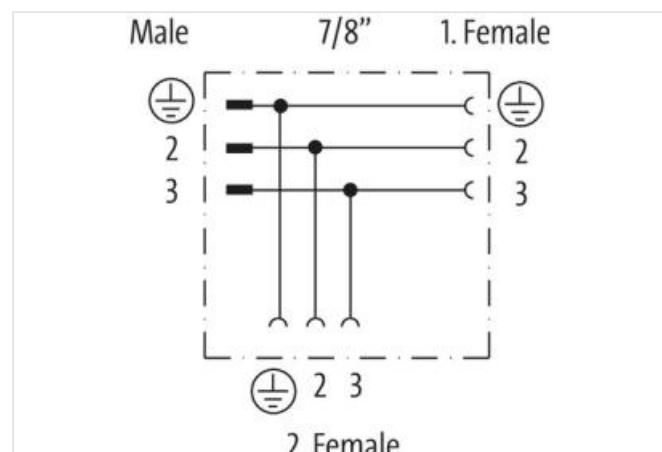
Female straight – female/male straight

7/8" – 7/8", 3-pole

Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

Form

Form 50071

Technical Data

Operating voltage	max. 250 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 10 A
Material group	IEC 60664-1, category II
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

Material	PA
Locking material	Zinc die casting, matte nickel plated
suitable for corrugated tube (internal Ø)	without
Housing	PA
Compression gland	7/8" (SW24)
General data	
Pollution Degree	3
Temperature range	-30...+90 °C
Product article number of manufacturer	7000-50071-0000000